


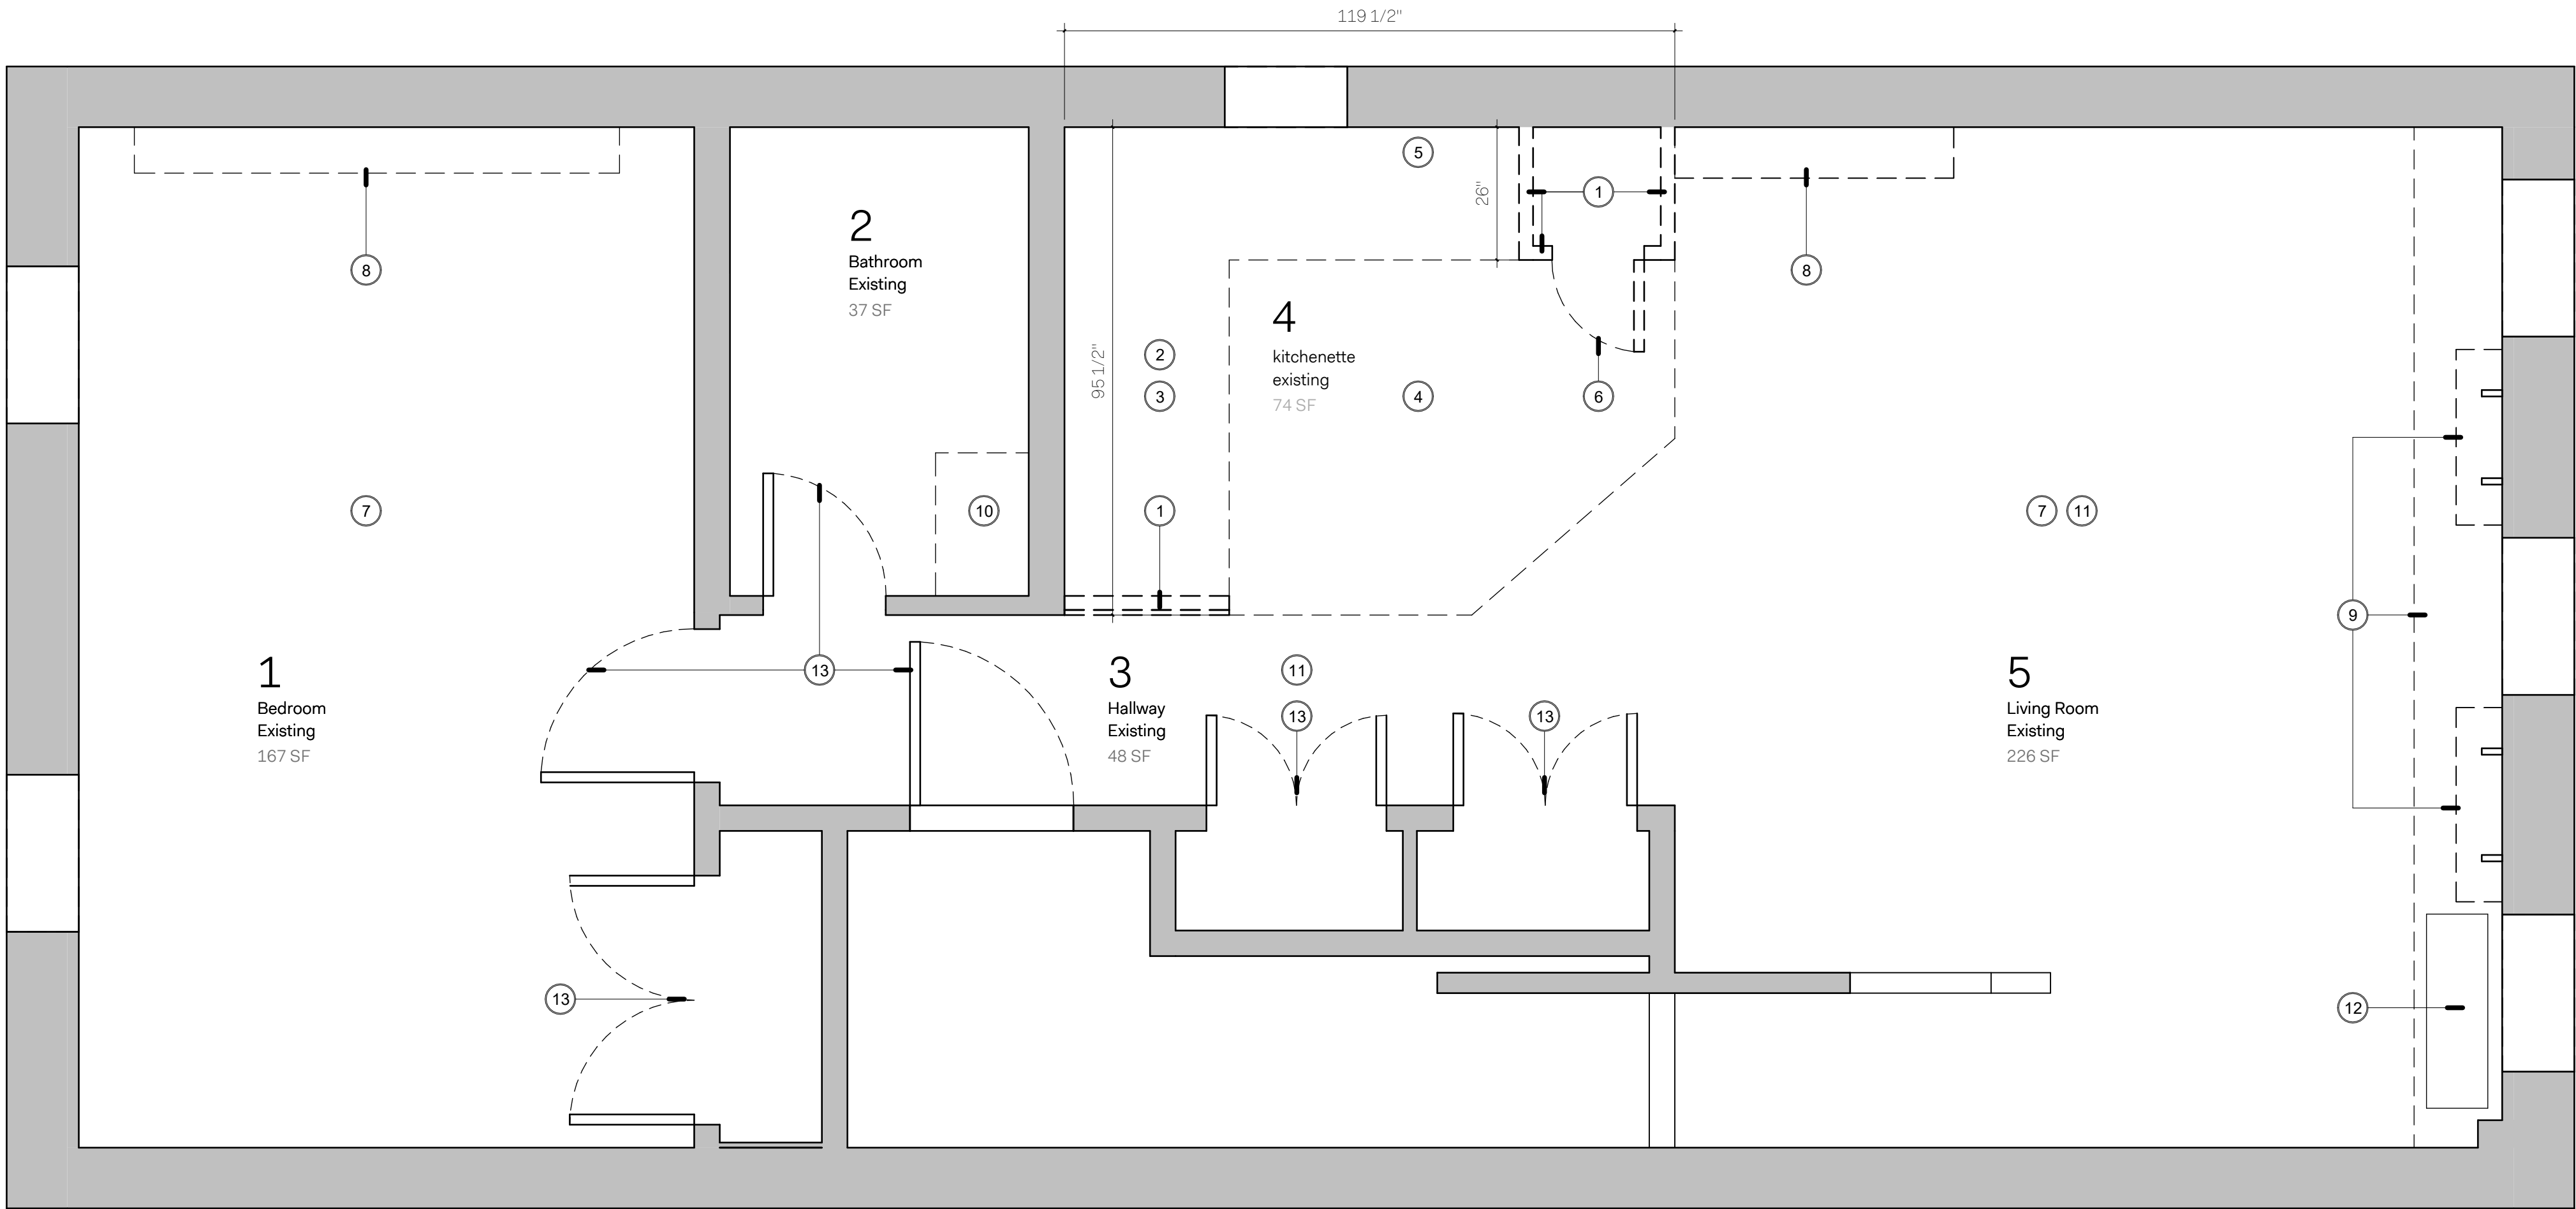

1 DEMOLITION FLOOR PLAN
1/2" = 1'-0"

DEMOLITION KEYNOTES	
KEYNOTE NUMBER	KEYNOTE DESCRIPTION
1	REMOVE EXISTING FRAMING FOR CLOSET BETWEEN KITCHENETTE AND LIVING ROOM, AND 30" WIDE FIN WALL THAT FLANKS THE EXISTING REFRIGERATOR (BOTH IN AGGREGATE <45SF).
2	REMOVE EXISTING CEILING SOFFIT AND LIGHTING IN KITCHENETTE.
3	REMOVE EXISTING KITCHEN BASE AND UPPER CABINETRY AND COUNTERTOP. REMOVE ALL FIXTURES AND APPLIANCES, RETAIN AND PROTECT TO BE SAVED AND REUSED. PROTECT OVEN RANGE TO REMAIN IN APARTMENT.
4	REMOVE ALL EXISTING KITCHEN TILE FLOORING AND ANY MUD SET TO EVALUATE CONDITION OF SUBFLOOR.
5	OPEN FURRING IN KITCHENETTE AS REQUIRED FOR NEW ELECTRICAL POINTS.
6	REMOVE DOOR.
7	PROTECT EXISTING WOOD FLOORING DURING DEMOLITION AND CONSTRUCTION. TO REMAIN AND BE REFINISHED.
8	REMOVE EXISTING SHELVING IN BEDROOM AND LIVING ROOM.
9	PROTECT EXISTING MILLWORK IN LIVING ROOM. TO REMAIN.
10	REMOVE EXISTING VANITY AND SINK IN BATHROOM. PROTECT FIXTURES AND CABINETRY FOR RESALE OR DONATION.
11	REMOVE EXISTING RECESSED LIGHTING. PROTECT FIXTURES FOR RESALE OR DONATION.
12	PROTECT AND REUSE EXISTING RADIATOR DURING CONSTRUCTION.
13	PROTECT DOOR, TO REMAIN.

CO Adaptive

Architects
CO Adaptive Architecture PLLC
Building 303, Suite 603
63 Flushing Avenue
Brooklyn, NY 11205
t. 347.586.0465
hello@coadaptive.co

Contractor
New Level Comfort Group LLC
8250 15th Ave. Unit F1
Brooklyn, NY 11234
t. 347.596.2972


Owner & Project Information

F8
8 FIRST STREET, BROOKLYN, NY 11231
Louise De Nexon

DOB NOW #

Drawing Title
Demolition Plan

Drawing Scale As indicated
100% @ Arch D (24" x 36")



Project Number

F8

Issue Date


04.28.2023

Sheet Number

1/

Drawing Number


DM-101

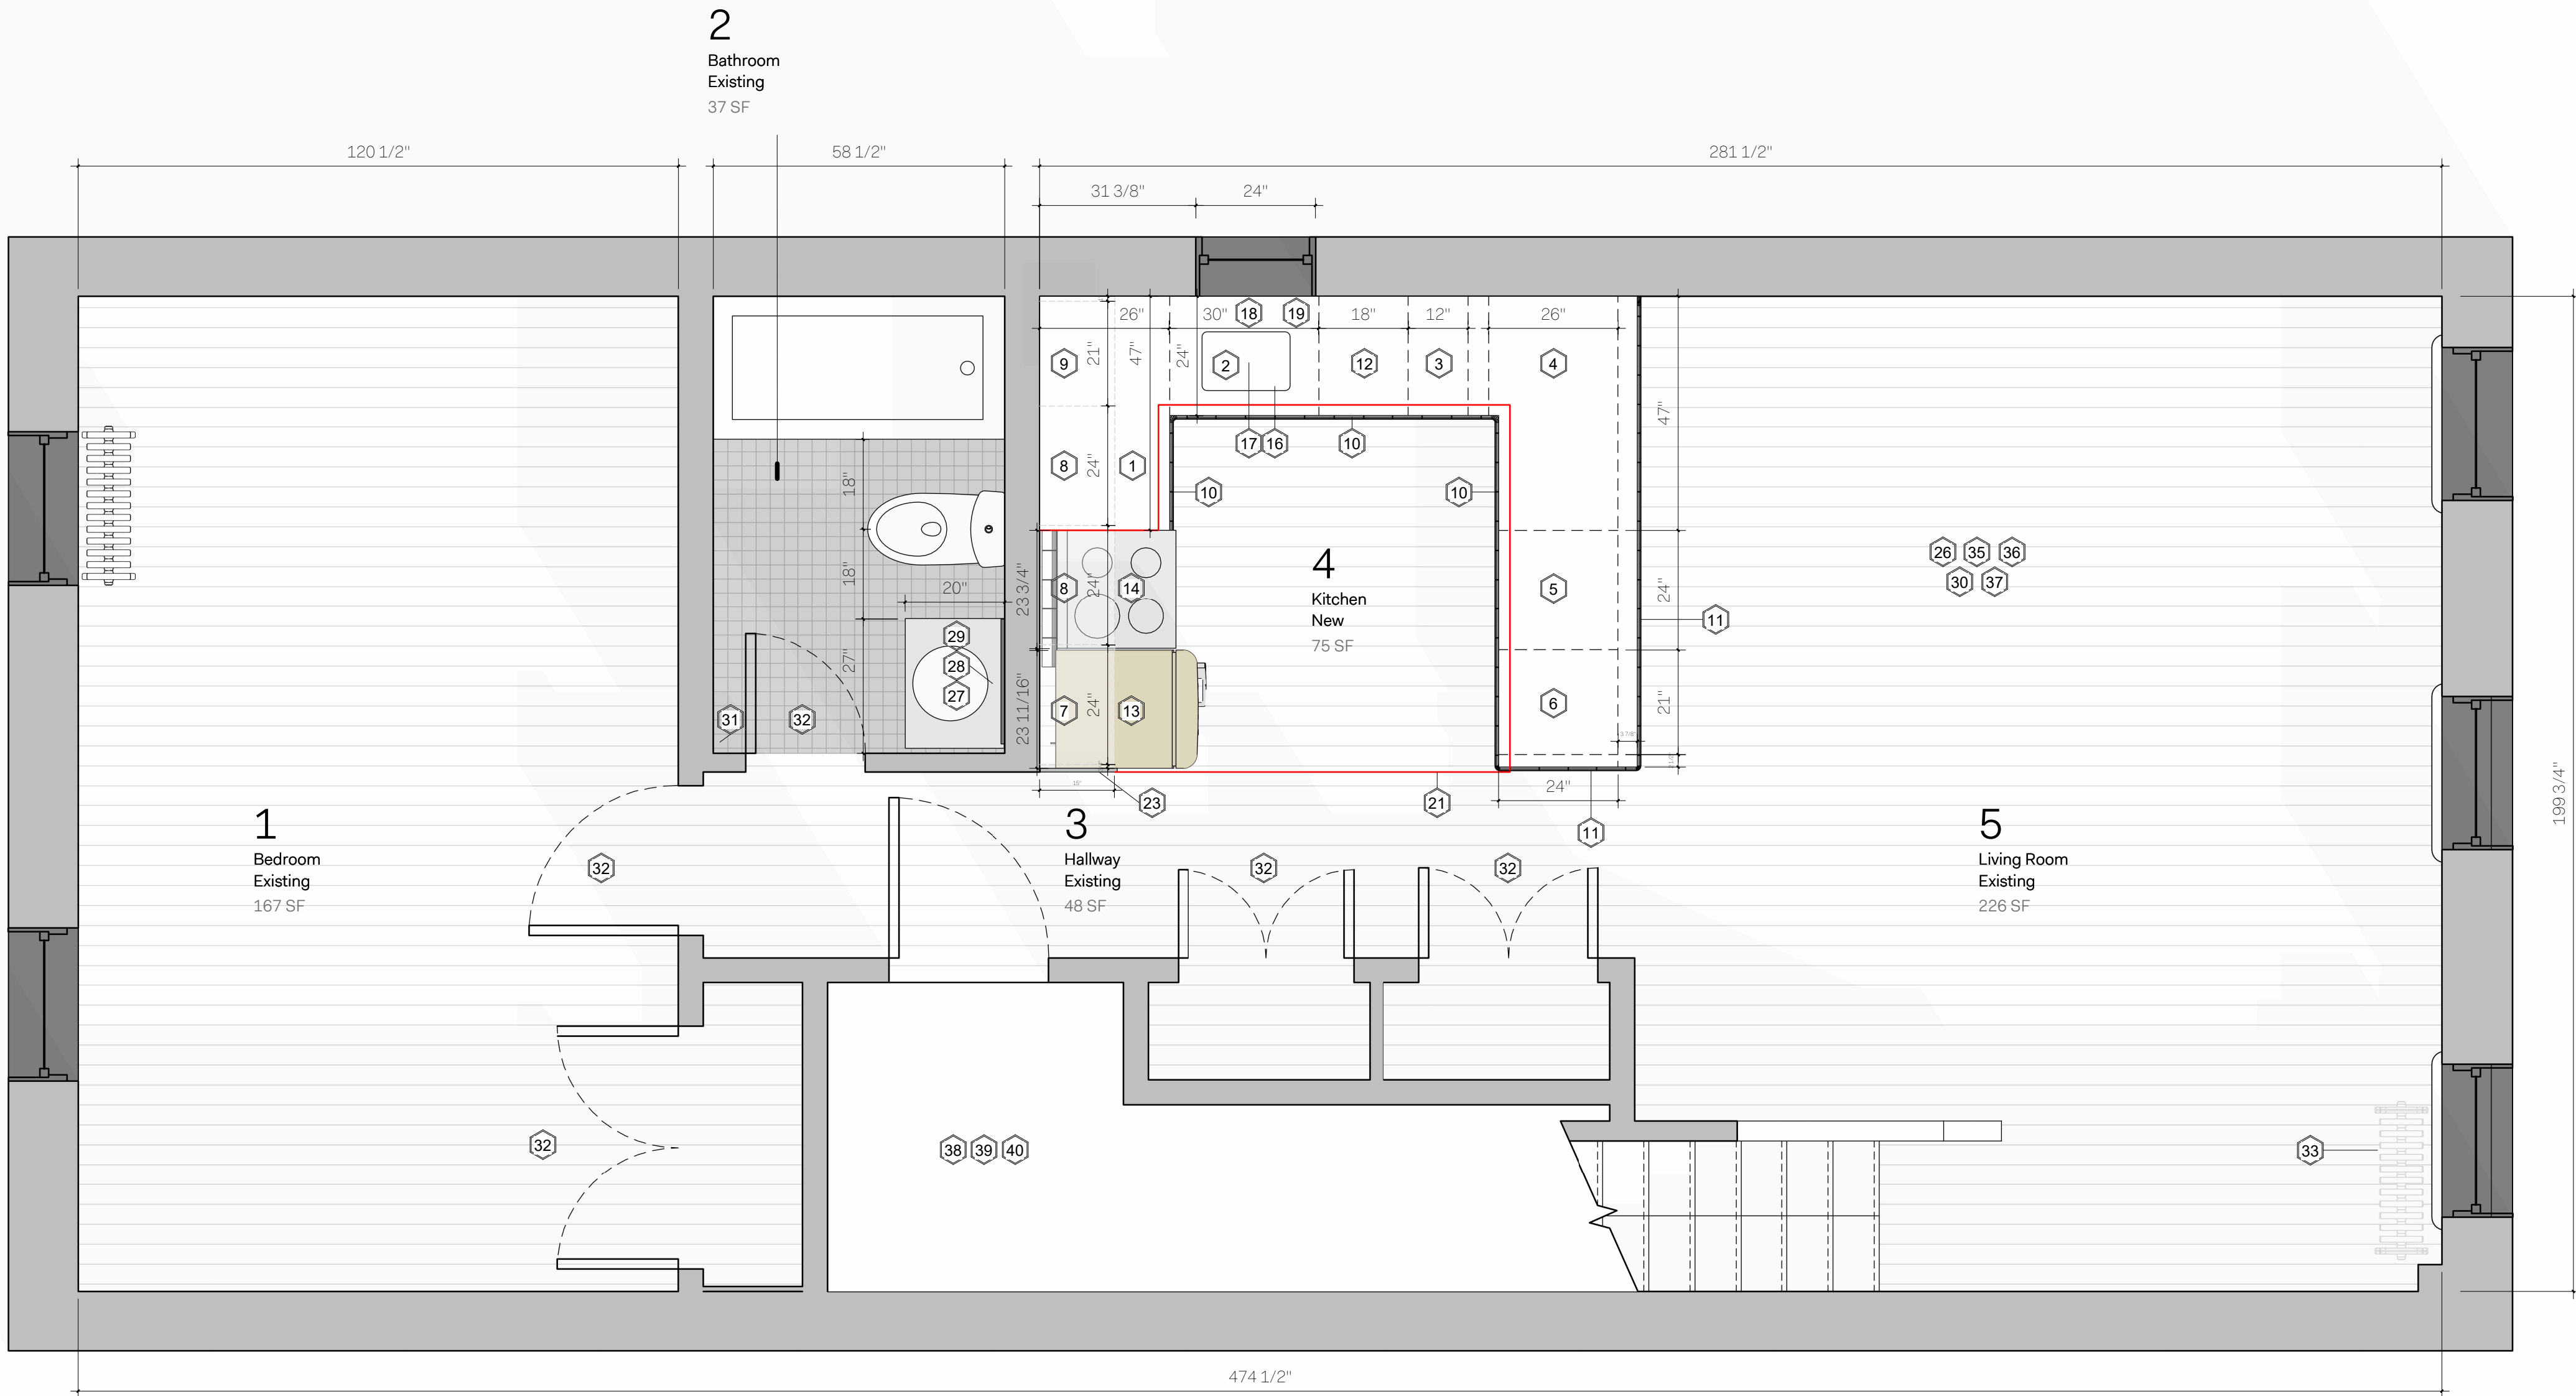

CONSTRUCTION KEYNOTES	
KEYNOTE	KEYNOTE
1	REFORM BASE CORNER, WHITE - 47"x26"x30"
2	REFORM BASE CABINET, WHITE - 30"x24"x30"
3	REFORM BASE CABINET, WHITE - 12"x24"x30"
4	REFORM BASE CORNER, WHITE - 47"x26"x30"
5	REFORM BASE CABINET, WHITE - 24"x24"x30"
6	REFORM BASE CABINET, WHITE - 21"x24"x30"
7	REFORM WALL CABINET, WHITE - 24"x15"x20"
8	REFORM WALL CABINET, WHITE - 24"x15"x30"
9	21" WIDE OPEN SHELVING CONSTRUCTED FROM REFORM PANELS.
10	REFORM PROFILE WHITE, CABINET FRONTS
11	FAUX CEMENT FINISH APPLIED TO CEMENT BOARD, CONTRACTOR TO PROVIDE 2-3 SAMPLES FOR CLIENT REVIEW.
12	NEW 18" DISHWASHER - BOSCH 800 SERIES SPX68B55UC
13	NEW 23" FRIDGE - SMEG FAB32ULCR3 (LEFT HINGED)
14	EXISTING RANGE TO REMAIN
15	NEW WHITE DTILE COUNTERTOP AND BACKSPLASH WITH 1/8" GROUT LINES, COLOR TO BE CONFIRMED WITH CLIENT. SEE PAGE _ FOR LAYOUT PLAN. (CONTRACTOR TO PROVIDE RFI)
16	NEW SINK/ FAUCET INSTALLED IN EXISTING LOCATIONS. ASSUMES ALL EXISTING BRANCH PIPING IN THE KITCHEN TO REMAIN.
17	REVIEW WATERPROOFING UNDER TILE SINK BASIN WITH ARCHITECT PRIOR TO COUNTERTOP TEMPLATING.
18	NEW KITCHEN SINK FAUCET (8" LOW PROFILE SPOUT WALL SURFACE MOUNT UTILITY FAUCET) INSTALLED ON BACKSPLASH WITH MOUNTING PROFILE CUT INTO TILE. INSTALLED CENTERED OVER SINK. TO HAVE A MAX FLOW RATE OF 2.2 GPM AT 60 PSI, PER NYC 2022 PLUMBING CODE TABLE 604.4.
19	DESIGN HOUSE BASIC KITCHEN SIDE SPRAYER (30181800) INSTALLED ON RIGHT INSIDE SADDLE DTILE AT RIGHT SINK CORNER
20	NEW ELICA 24" WIDE UNDER CABINET RANGE HOOD (ETT424SS).
21	LATICRETE 9235 WATERPROOF SYSTEM TO BE USED OVER KITCHEN SUBFLOOR WITH ALUMINUM EDGING TO ENCAPSULATE KITCHEN AREA.
22	3"-4" HIGH PAINT GRADE WOOD TOEKICK. HEIGHT VARIABLE BASED ON RESULTING SPACE LEFT OVER FROM FIXED ALIGNMENT OF TOP OF SHELF TO WINDOW SILL.
23	NEW 3/4" PAINT GRADE WOOD PANEL FRAMING FRIDGE, 15" TO MATCH UPPER CABINET DEPTH ABOVE.
24	NEW BATHROOM LAVATORY FAUCET TO HAVE A MAX FLOW RATE OF 1.5 GPM AT 60 PSI, PER NYC 2022 PLUMBING CODE TABLE 604.4.
25	NEW SHUTOFF VALVES TO BE INSTALLED AND EXISTING PLUMBING LINES TO BE INSPECTED AT NEW FIXTURE LOCATIONS. ACCESS PLUMBING BRANCH LINES FROM KITCHEN SIDE - NO DEMOLITION OF BATHROOM SIDE FINISHES.
26	48 HOUR NOTICE TO BE PROVIDED BEFORE ANY REQUIRED WATER SHUTOFFS.
27	ROUND WHITE CERAMIC VESSEL SINK (SCARABEO 1807)
28	LEXIS SINGLE-HOLE VESSEL FAUCET, CHROME (953761)
29	CUSTOM BATHROOM VANITY FINISHED WITH FAUX CEMENT FINISH APPLIED TO CEMENT BOARD, CONTRACTOR TO PROVIDE 2-3 CONTROL SAMPLES FOR CLIENT REVIEW.
30	NEW HARDWOOD FLOORING OVER ACOUSTIC UNDERLAYMENT THROUGHOUT APARTMENT (EXCEPT BATHROOM FLOORING TO REMAIN AS-IS), ENGINEERED 3/4" THICK SITE FINISHED HARDWOOD (4" WIDE PANELS). TO BE PAINTED AND SEALED ON SITE.
31	SINGLE MISSING BATHROOM TILE TO BE REPLACED.
32	REPAINT EXISTING DOOR AND REPLACE HARDWARE.
33	EXISTING RADIATOR TO REMAIN EXPOSED AND REPAINTED WHITE WITH 3/4" PAINT GRADE WOOD OVER TOP
34	BOCCE SYSTEM 22 WHITE DOUBLE OUTLET DIAGONAL LONG, TO BE INSTALLED IN DTILE CUT TO PROFILE. (22.5.6L)
35	NEW ELECTRICAL POINTS THROUGHOUT PER PLAN AND AS REQUIRED BY CODE.
36	NEW LIGHTING AND/OR SWITCHABLE OUTLETS THROUGHOUT APARTMENT
37	ALL INTERIOR WALLS TO BE REPAINTED COLOR APPROVED BY CLIENT
38	PROTECT WALLS AND FLOORS IN COMMON AREAS DURING MATERIAL TRANSIT TO PREVENT DUST FROM ENTERING THE COMMON AREAS TO THE GREATEST EXTENT POSSIBLE. NOISE TO BE LIMITED IN THE HALLWAYS AS MUCH AS POSSIBLE.
39	WORK TO BE PERFORMED BETWEEN 9AM-6PM WITH NO WORK ALLOWED ON NATIONAL HOLIDAYS.
40	SUBMIT ALL CONTRACTOR LICENSES AND INSURANCES BEFORE COMMENCING WORK. THE INSURANCE CERTIFICATES SHOULD LIST 8 FIRST STREET BUYERS CORP AS AN ADDITIONALLY INSURED PARTY.

1 Construction Floor Plan
1/2" = 1'-0"

2 Section Perspective

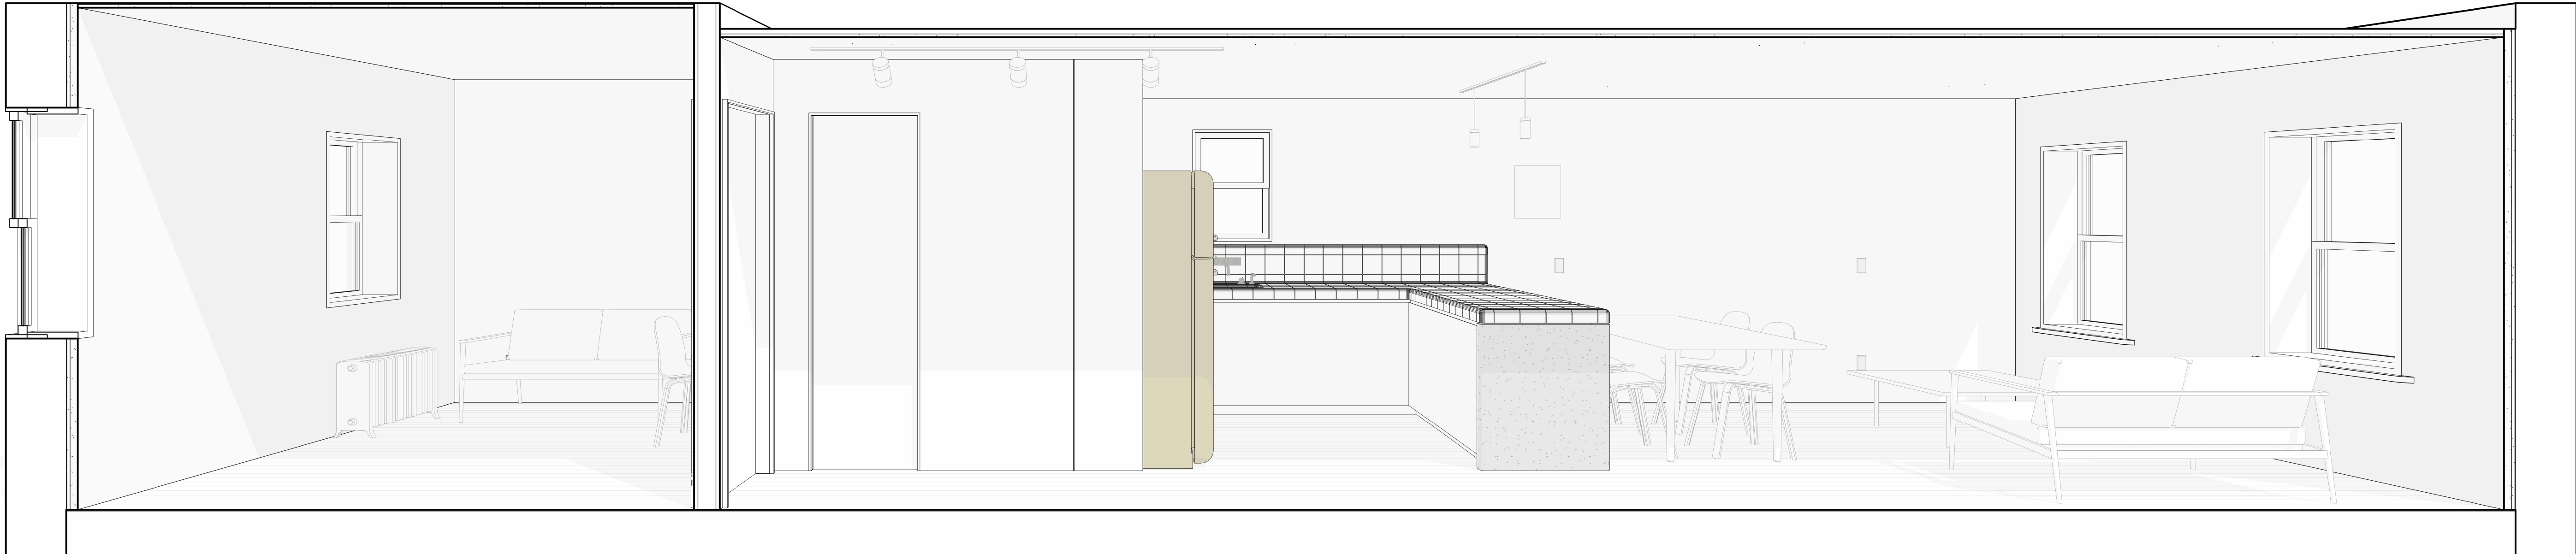

CO Adaptive

Architects
CO Adaptive Architecture PLLC
Building 303, Suite 603
63 Flushing Avenue
Brooklyn, NY 11205
t. 347.586.0455
hello@coadaptive.co

Contractor
New Level Comfort Group LLC
8250 15th Ave. Unit F1
Brooklyn, NY 11234
t. 347.896.2972

Owner & Project Information

F8

8 FIRST STREET, BROOKLYN, NY 11231

Louise De Neuron

DOB NOW #

Drawing Title

**Construction Floor Plan &
Section Perspective**

Drawing Scale: 1/2" = 1'-0"

100% @ Arch D(24"x36")

Project Number

F8

Issue Date


04.28.2023

Sheet Number


2 /

Drawing Number


A-100

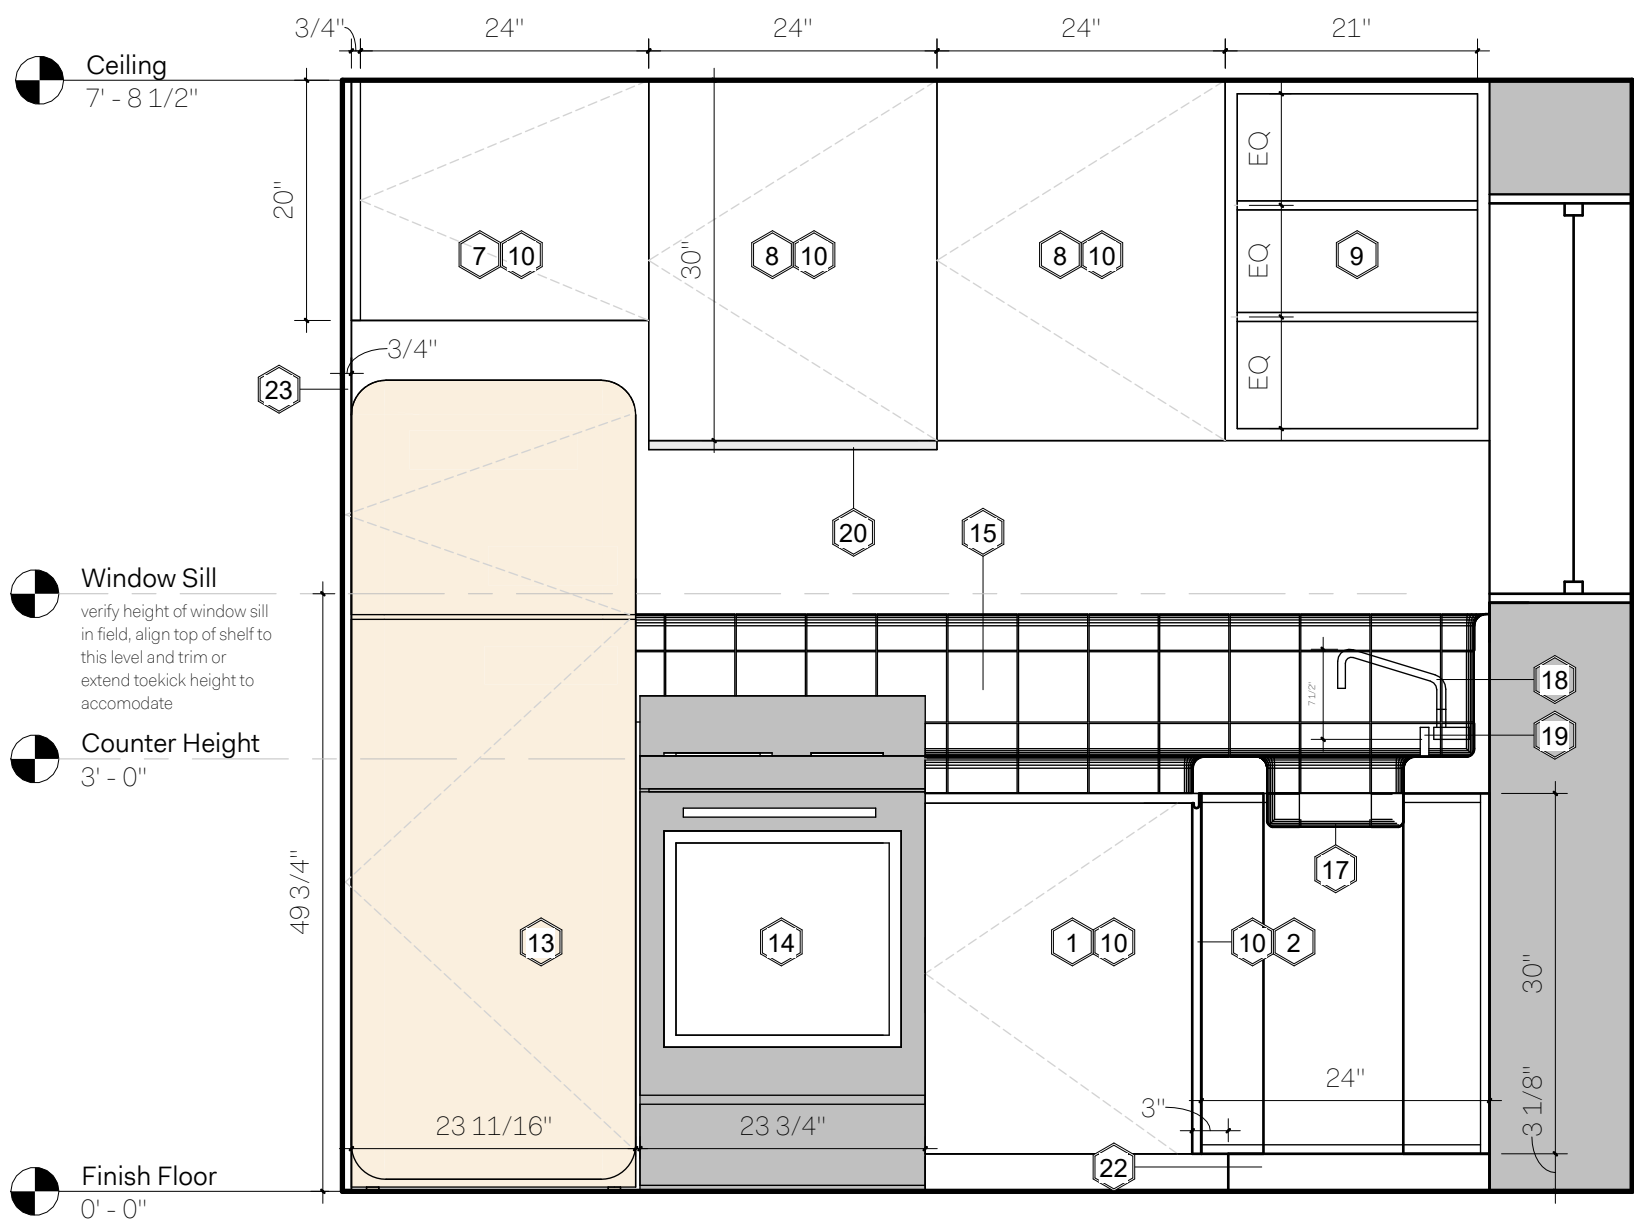

3 Kitchen Elevation West Option 1
3/4" = 1'-0"

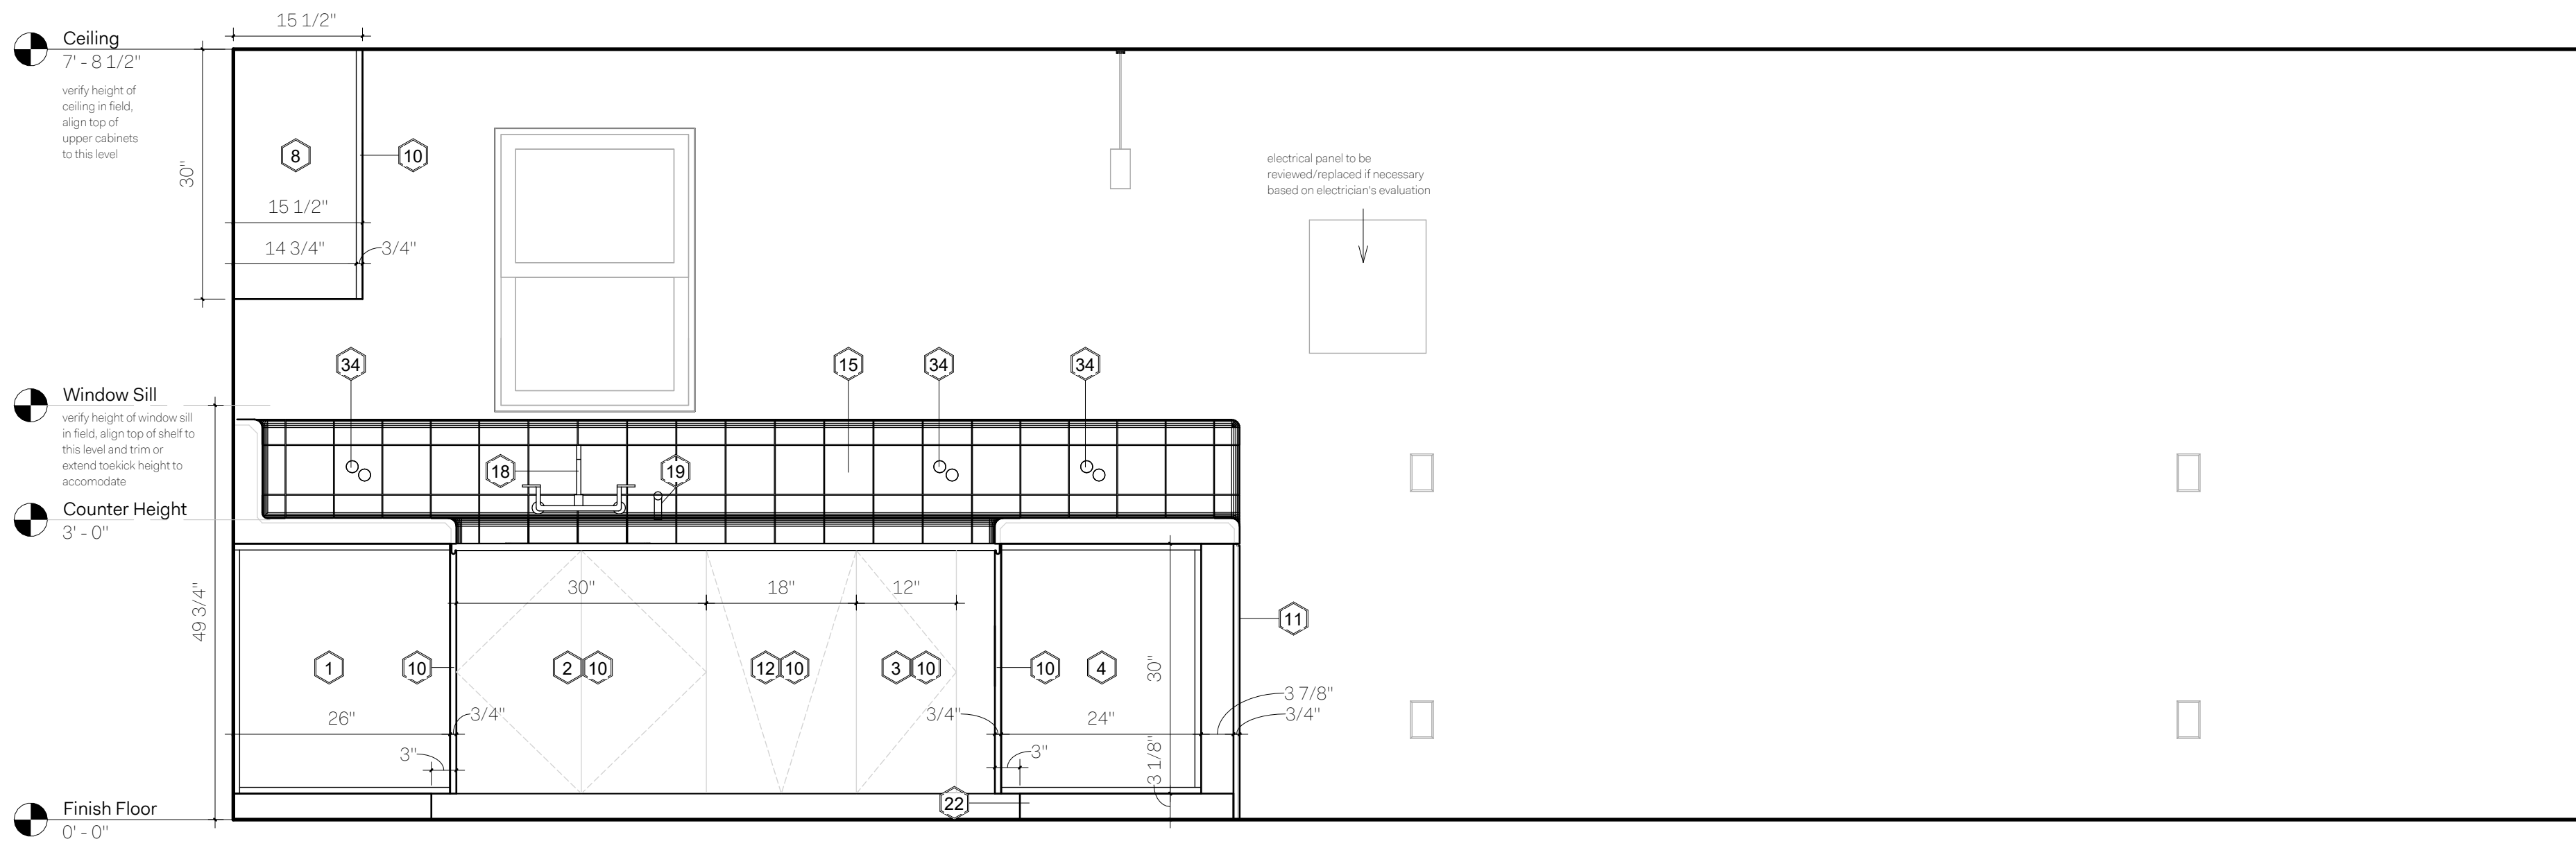

2 Kitchen & Living Elevation North
3/4" = 1'-0"

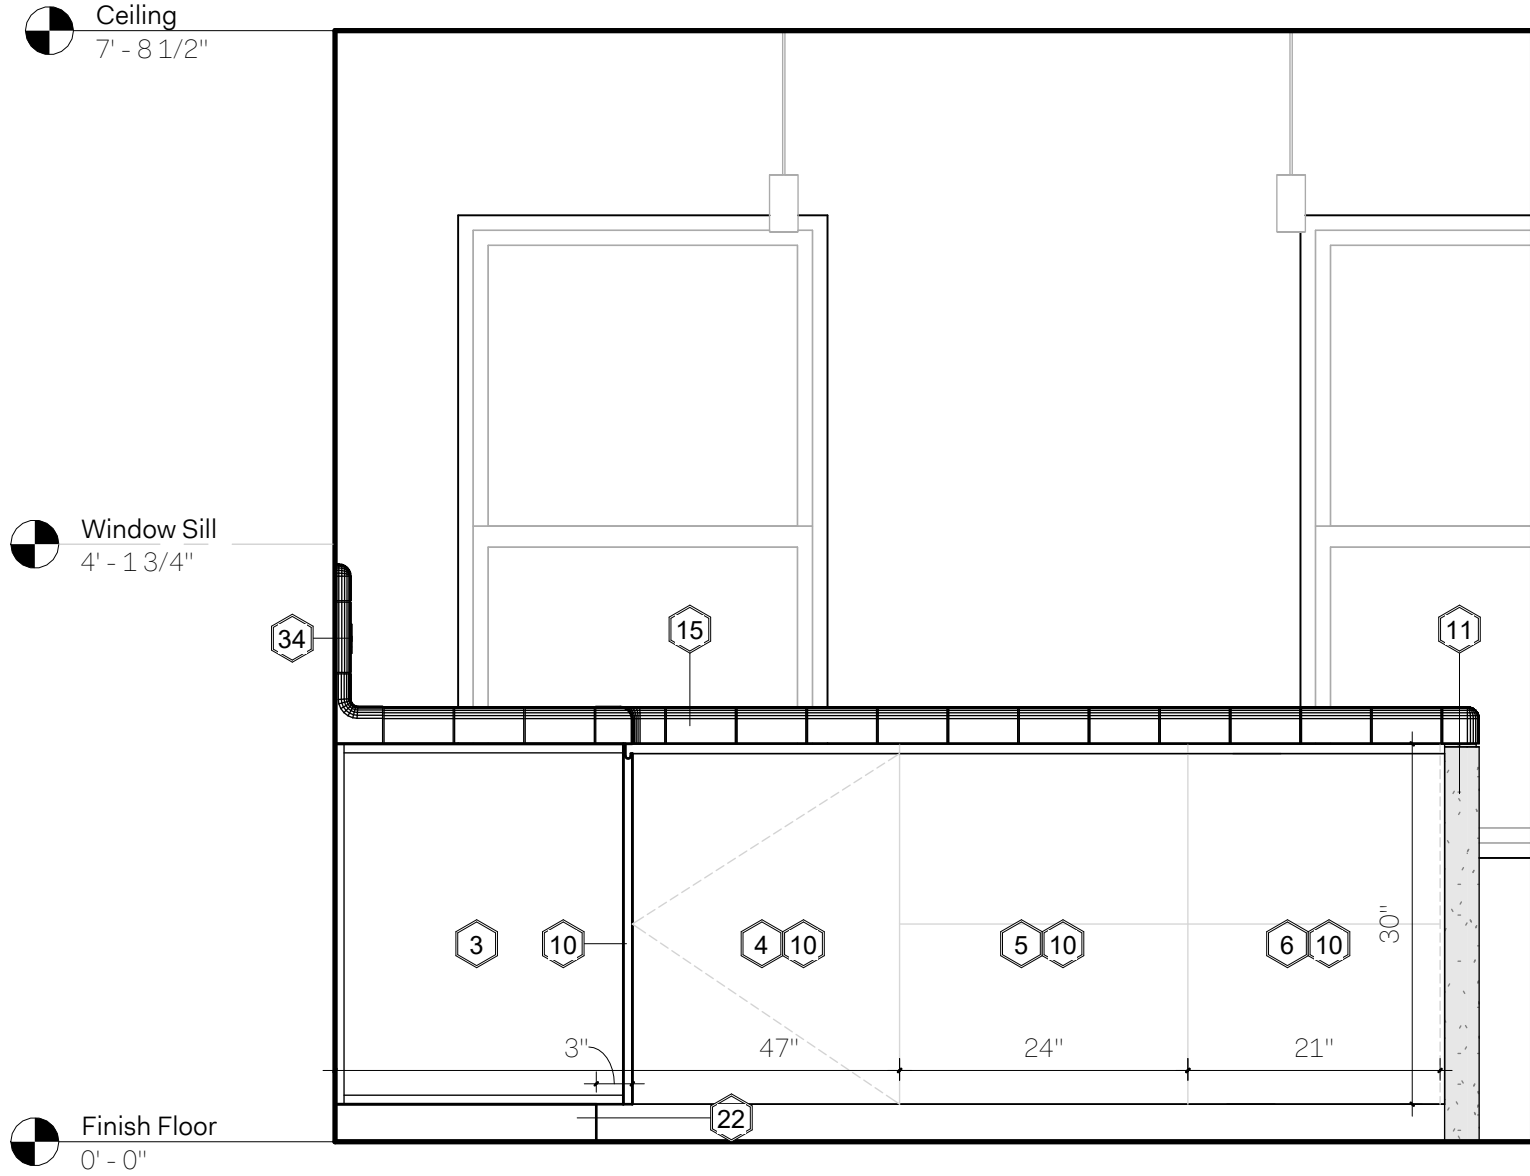

1 Kitchen Elevation East
3/4" = 1'-0"

CONSTRUCTION KEYNOTES	
KEYNOTE	KEYNOTE
1	REFORM BASE CORNER, WHITE - 47"X26"X30"
2	REFORM BASE CABINET, WHITE - 30"X24"X30"
3	REFORM BASE CABINET, WHITE - 12"X24"X30"
4	REFORM BASE CORNER, WHITE - 47"X26"X30"
5	REFORM BASE CABINET, WHITE - 24"X24"X30"
6	REFORM BASE CABINET, WHITE - 21"X24"X30"
7	REFORM WALL CABINET, WHITE - 24"X15"X20"
8	REFORM WALL CABINET, WHITE - 24"X15"X30"
9	21" WIDE OPEN SHELVING CONSTRUCTED FROM REFORM PANELS.
10	REFORM PROFILE WHITE, CABINET FRONTS
11	FAUX CEMENT FINISH APPLIED TO CEMENT BOARD, CONTRACTOR TO PROVIDE 2-3 SAMPLES FOR CLIENT REVIEW.
12	NEW 18" DISHWASHER - BOSCH 800 SERIES SPX68B5UC
13	NEW 23" FRIDGE - SMEG FAB32ULCR3 (LEFT HINGED)
14	EXISTING RANGE TO REMAIN
15	NEW WHITE DTILE COUNTERTOP AND BACKSPLASH WITH 1/8" GROUT LINES, COLOR TO BE CONFIRMED WITH CLIENT. SEE PAGE _ FOR LAYOUT PLAN. (CONTRACTOR TO PROVIDE RFI)
16	NEW SINK/ FAUCET INSTALLED IN EXISTING LOCATIONS. ASSUMES ALL EXISTING BRANCH PIPING IN THE KITCHEN TO REMAIN.
17	REVIEW WATERPROOFING UNDER TILE SINK BASIN WITH ARCHITECT PRIOR TO COUNTERTOP TEMPLATING.
18	NEW KITCHEN SINK FAUCET (8" LOW PROFILE SPOUT WALL SURFACE MOUNT UTILITY FAUCET) INSTALLED ON BACKSPLASH WITH MOUNTING PROFILE CUT INTO TILE. INSTALLED CENTERED OVER SINK. TO HAVE A MAX FLOW RATE OF 2.2 GPM AT 60 PSI, PER NYC 2022 PLUMBING CODE TABLE 604.4.
19	DESIGN HOUSE BASIC KITCHEN SIDE SPRAYER (30181800) INSTALLED ON RIGHT INSIDE SADDLE DTILE AT RIGHT SINK CORNER
20	NEW ELICA 24" WIDE UNDER CABINET RANGE HOOD (ETT424SS).
21	LATICRETE 9235 WATERPROOF SYSTEM TO BE USED OVER KITCHEN SUBFLOOR WITH ALUMINUM EDGING TO ENCAPSULATE KITCHEN AREA.
22	3"-4" HIGH PAINT GRADE WOOD TOEKICK. HEIGHT VARIABLE BASED ON RESULTING SPACE LEFT OVER FROM FIXED ALIGNMENT OF TOP OF SHELF TO WINDOW SILL.
23	NEW 3/4" PAINT GRADE WOOD PANEL FRAMING FRIDGE, 15" TO MATCH UPPER CABINET DEPTH ABOVE.
24	NEW BATHROOM LAVATORY FAUCET TO HAVE A MAX FLOW RATE OF 1.5 GPM AT 60 PSI, PER NYC 2022 PLUMBING CODE TABLE 604.4.
25	NEW SHUTOFF VALVES TO BE INSTALLED AND EXISTING PLUMBING LINES TO BE INSPECTED AT NEW FIXTURE LOCATIONS. ACCESS PLUMBING BRANCH LINES FROM KITCHEN SIDE - NO DEMOLITION OF BATHROOM SIDE FINISHES.
26	48 HOUR NOTICE TO BE PROVIDED BEFORE ANY REQUIRED WATER SHUTOFFS.
27	ROUND WHITE CERAMIC VESSEL SINK (SCARABEO 1807)
28	LEXIS SINGLE-HOLE VESSEL FAUCET, CHROME (953761)
29	CUSTOM BATHROOM VANITY FINISHED WITH FAUX CEMENT FINISH APPLIED TO CEMENT BOARD, CONTRACTOR TO PROVIDE 2-3 CONTROL SAMPLES FOR CLIENT REVIEW.
30	NEW HARDWOOD FLOORING OVER ACOUSTIC UNDERLAYMENT THROUGHOUT APARTMENT (EXCEPT BATHROOM FLOORING TO REMAIN AS-IS). ENGINEERED 3/4" THICK SITE FINISHED HARDWOOD (4" WIDE PANELS). TO BE PAINTED AND SEALED ON SITE.
31	SINGLE MISSING BATHROOM TILE TO BE REPLACED.
32	REPAINT EXISTING DOOR AND REPLACE HARDWARE.
33	EXISTING RADIATOR TO REMAIN EXPOSED AND REPAINTED WHITE WITH 3/4" PAINT GRADE WOOD OVER TOP
34	BOCCE SYSTEM 22 WHITE DOUBLE OUTLET DIAGONAL LONG, TO BE INSTALLED IN DTILE CUT TO PROFILE. (22.5.6L)
35	NEW ELECTRICAL POINTS THROUGHOUT PER PLAN AND AS REQUIRED BY CODE.
36	NEW LIGHTING AND/OR SWITCHABLE OUTLETS THROUGHOUT APARTMENT
37	ALL INTERIOR WALLS TO BE REPAINTED COLOR APPROVED BY CLIENT
38	PROTECT WALLS AND FLOORS IN COMMON AREAS DURING MATERIAL TRANSIT TO PREVENT DUST FROM ENTERING THE COMMON AREAS TO THE GREATEST EXTENT POSSIBLE. NOISE TO BE LIMITED IN THE HALLWAYS AS MUCH AS POSSIBLE.
39	WORK TO BE PERFORMED BETWEEN 9AM-6PM WITH NO WORK ALLOWED ON NATIONAL HOLIDAYS.
40	SUBMIT ALL CONTRACTOR LICENSES AND INSURANCES BEFORE COMMENCING WORK. THE INSURANCE CERTIFICATES SHOULD LIST 8 FIRST STREET BUYERS CORP AS AN ADDITIONALLY INSURED PARTY.

CO
Adaptive

Architect
CO Adaptive Architecture PLLC
Building 303, Suite 603
63 Flushing Avenue
Brooklyn, NY 11205
t. 347.586.0465
hello@coadaptive.co

Contractor
New Level Comfort Group LLC
8250 15th Ave. Unit F1
Brooklyn, NY 11234
t. 347.896.2972

Owner & Project Information
F8
8 FIRST STREET, BROOKLYN, NY 11231
Louise De Neuron

DOB NOW #

Drawing Title
Interior Elevations

Drawing Scale - 3/4" = 1'-0"
100% @ Arch D (24"x36")

Project Number

F8

Issue Date



04.28.2023

Sheet Number


3 /

Drawing Number

A-400

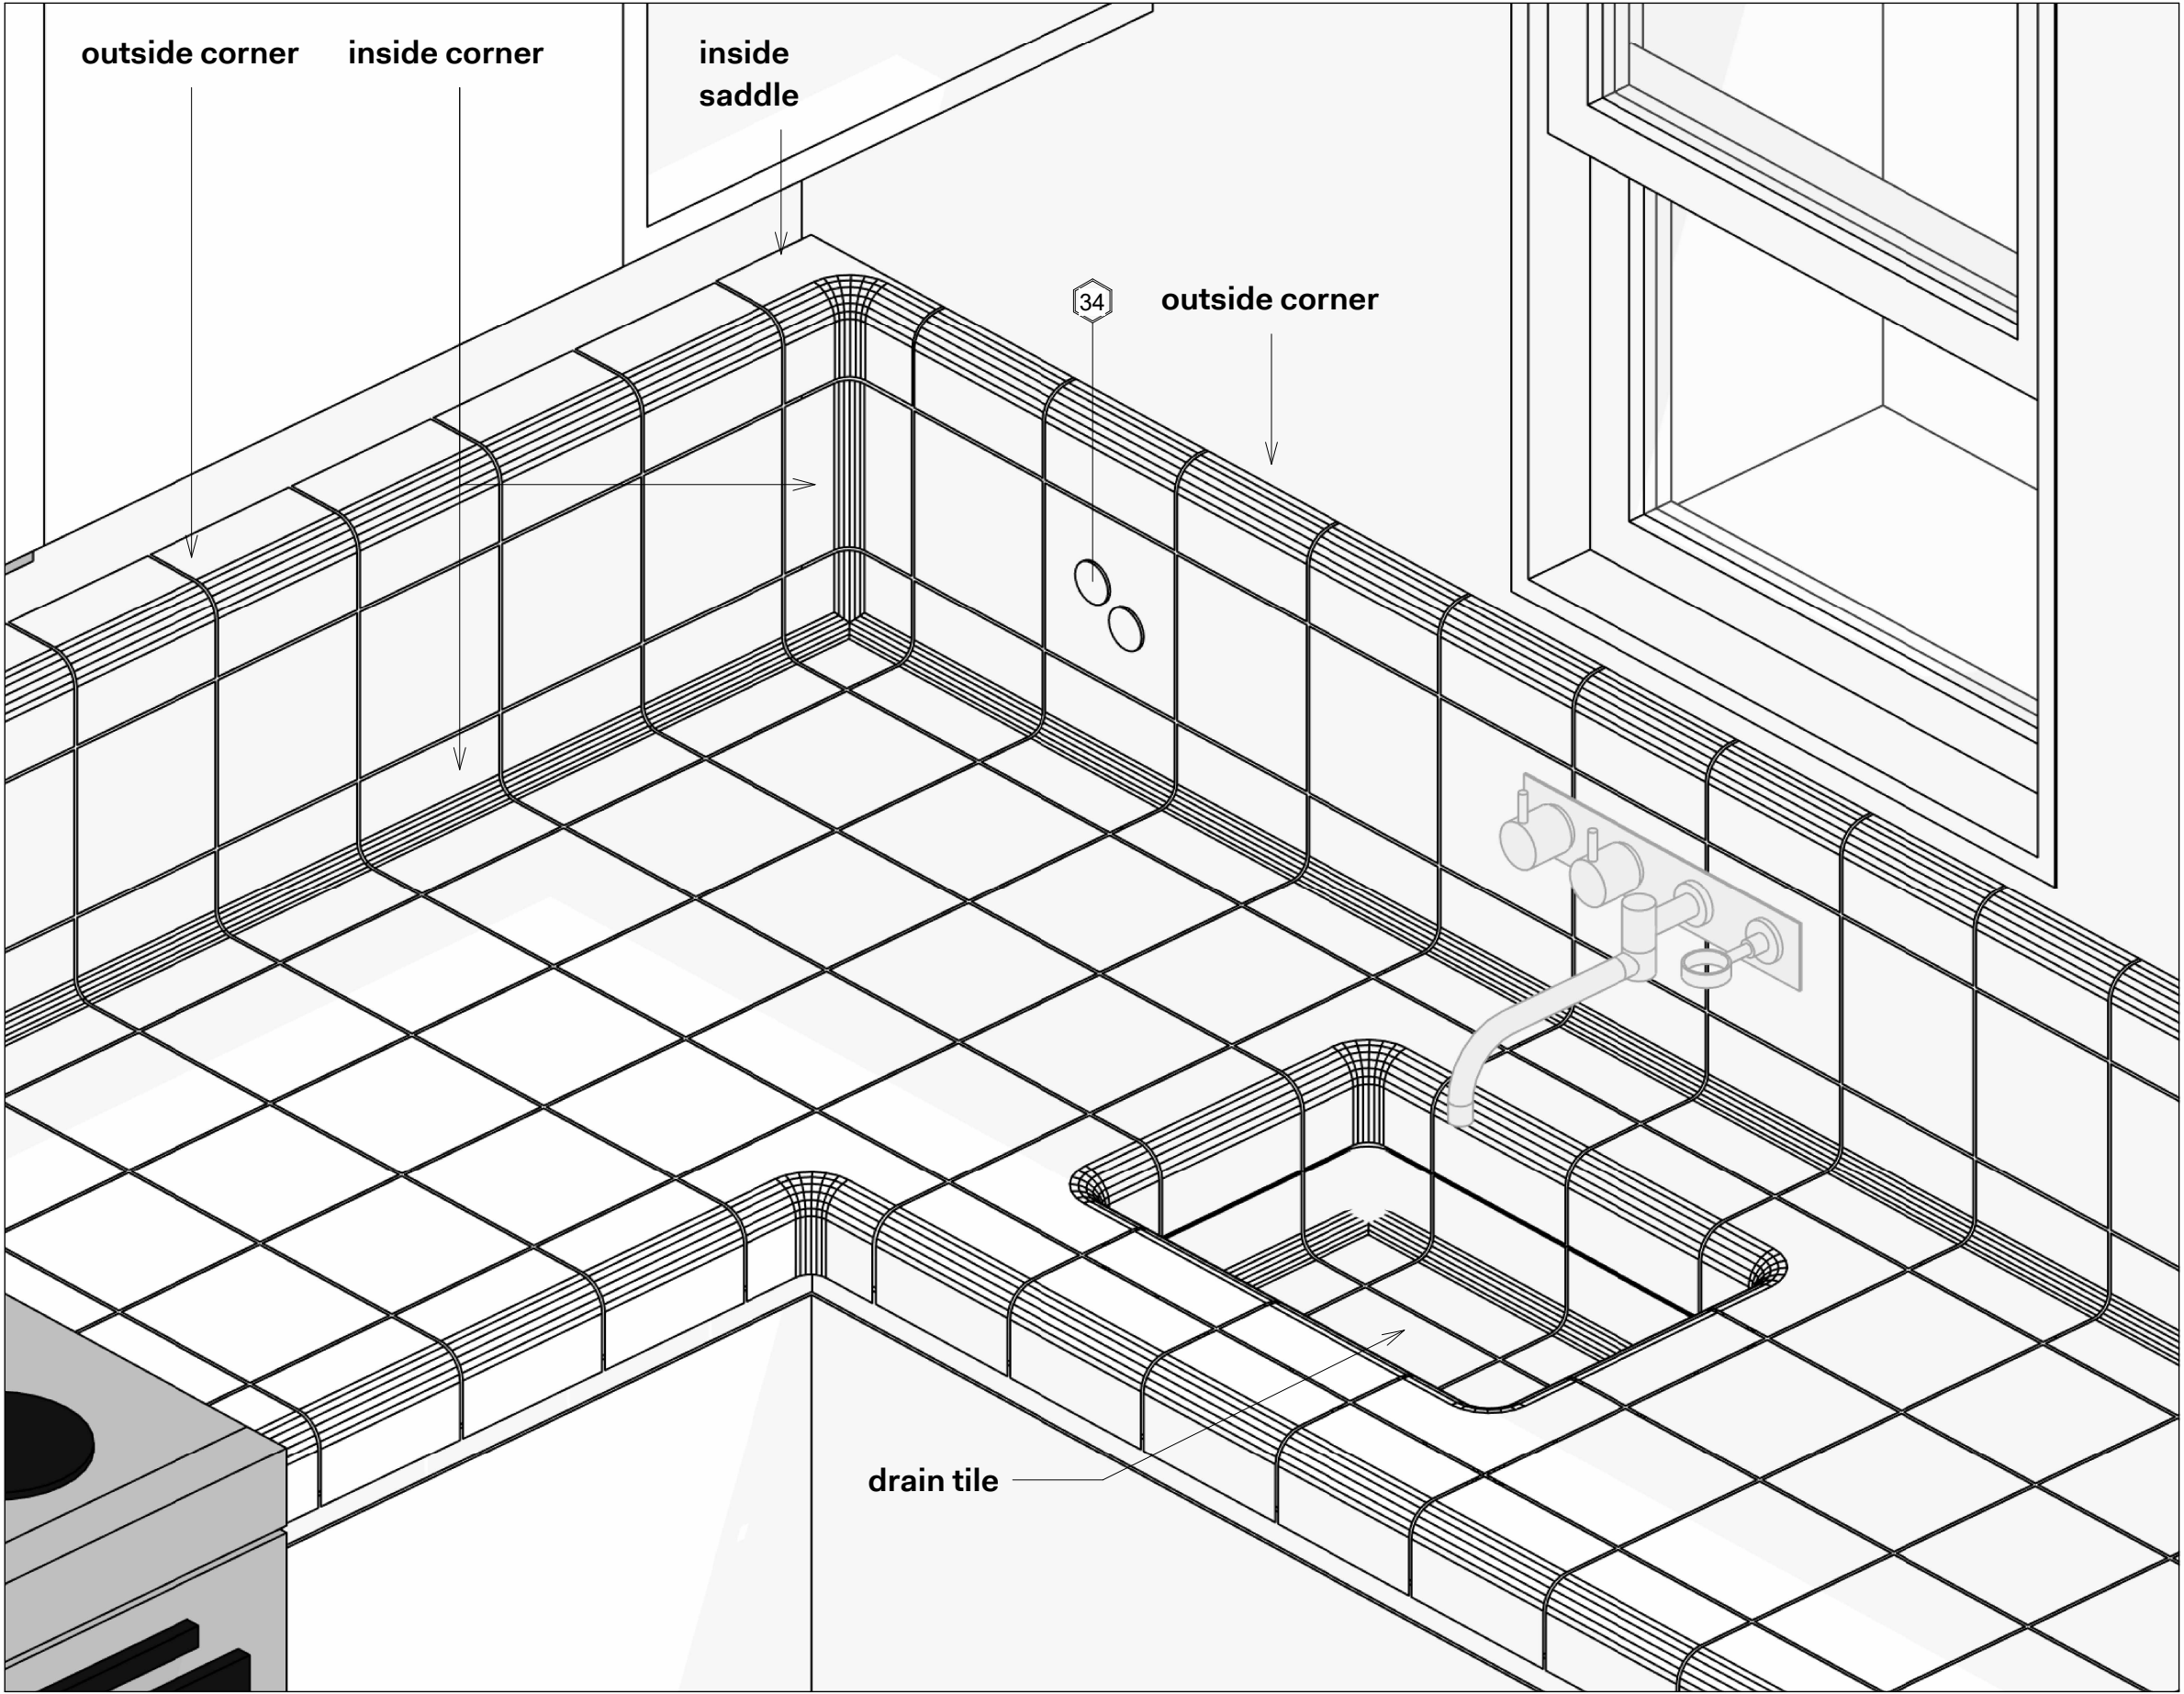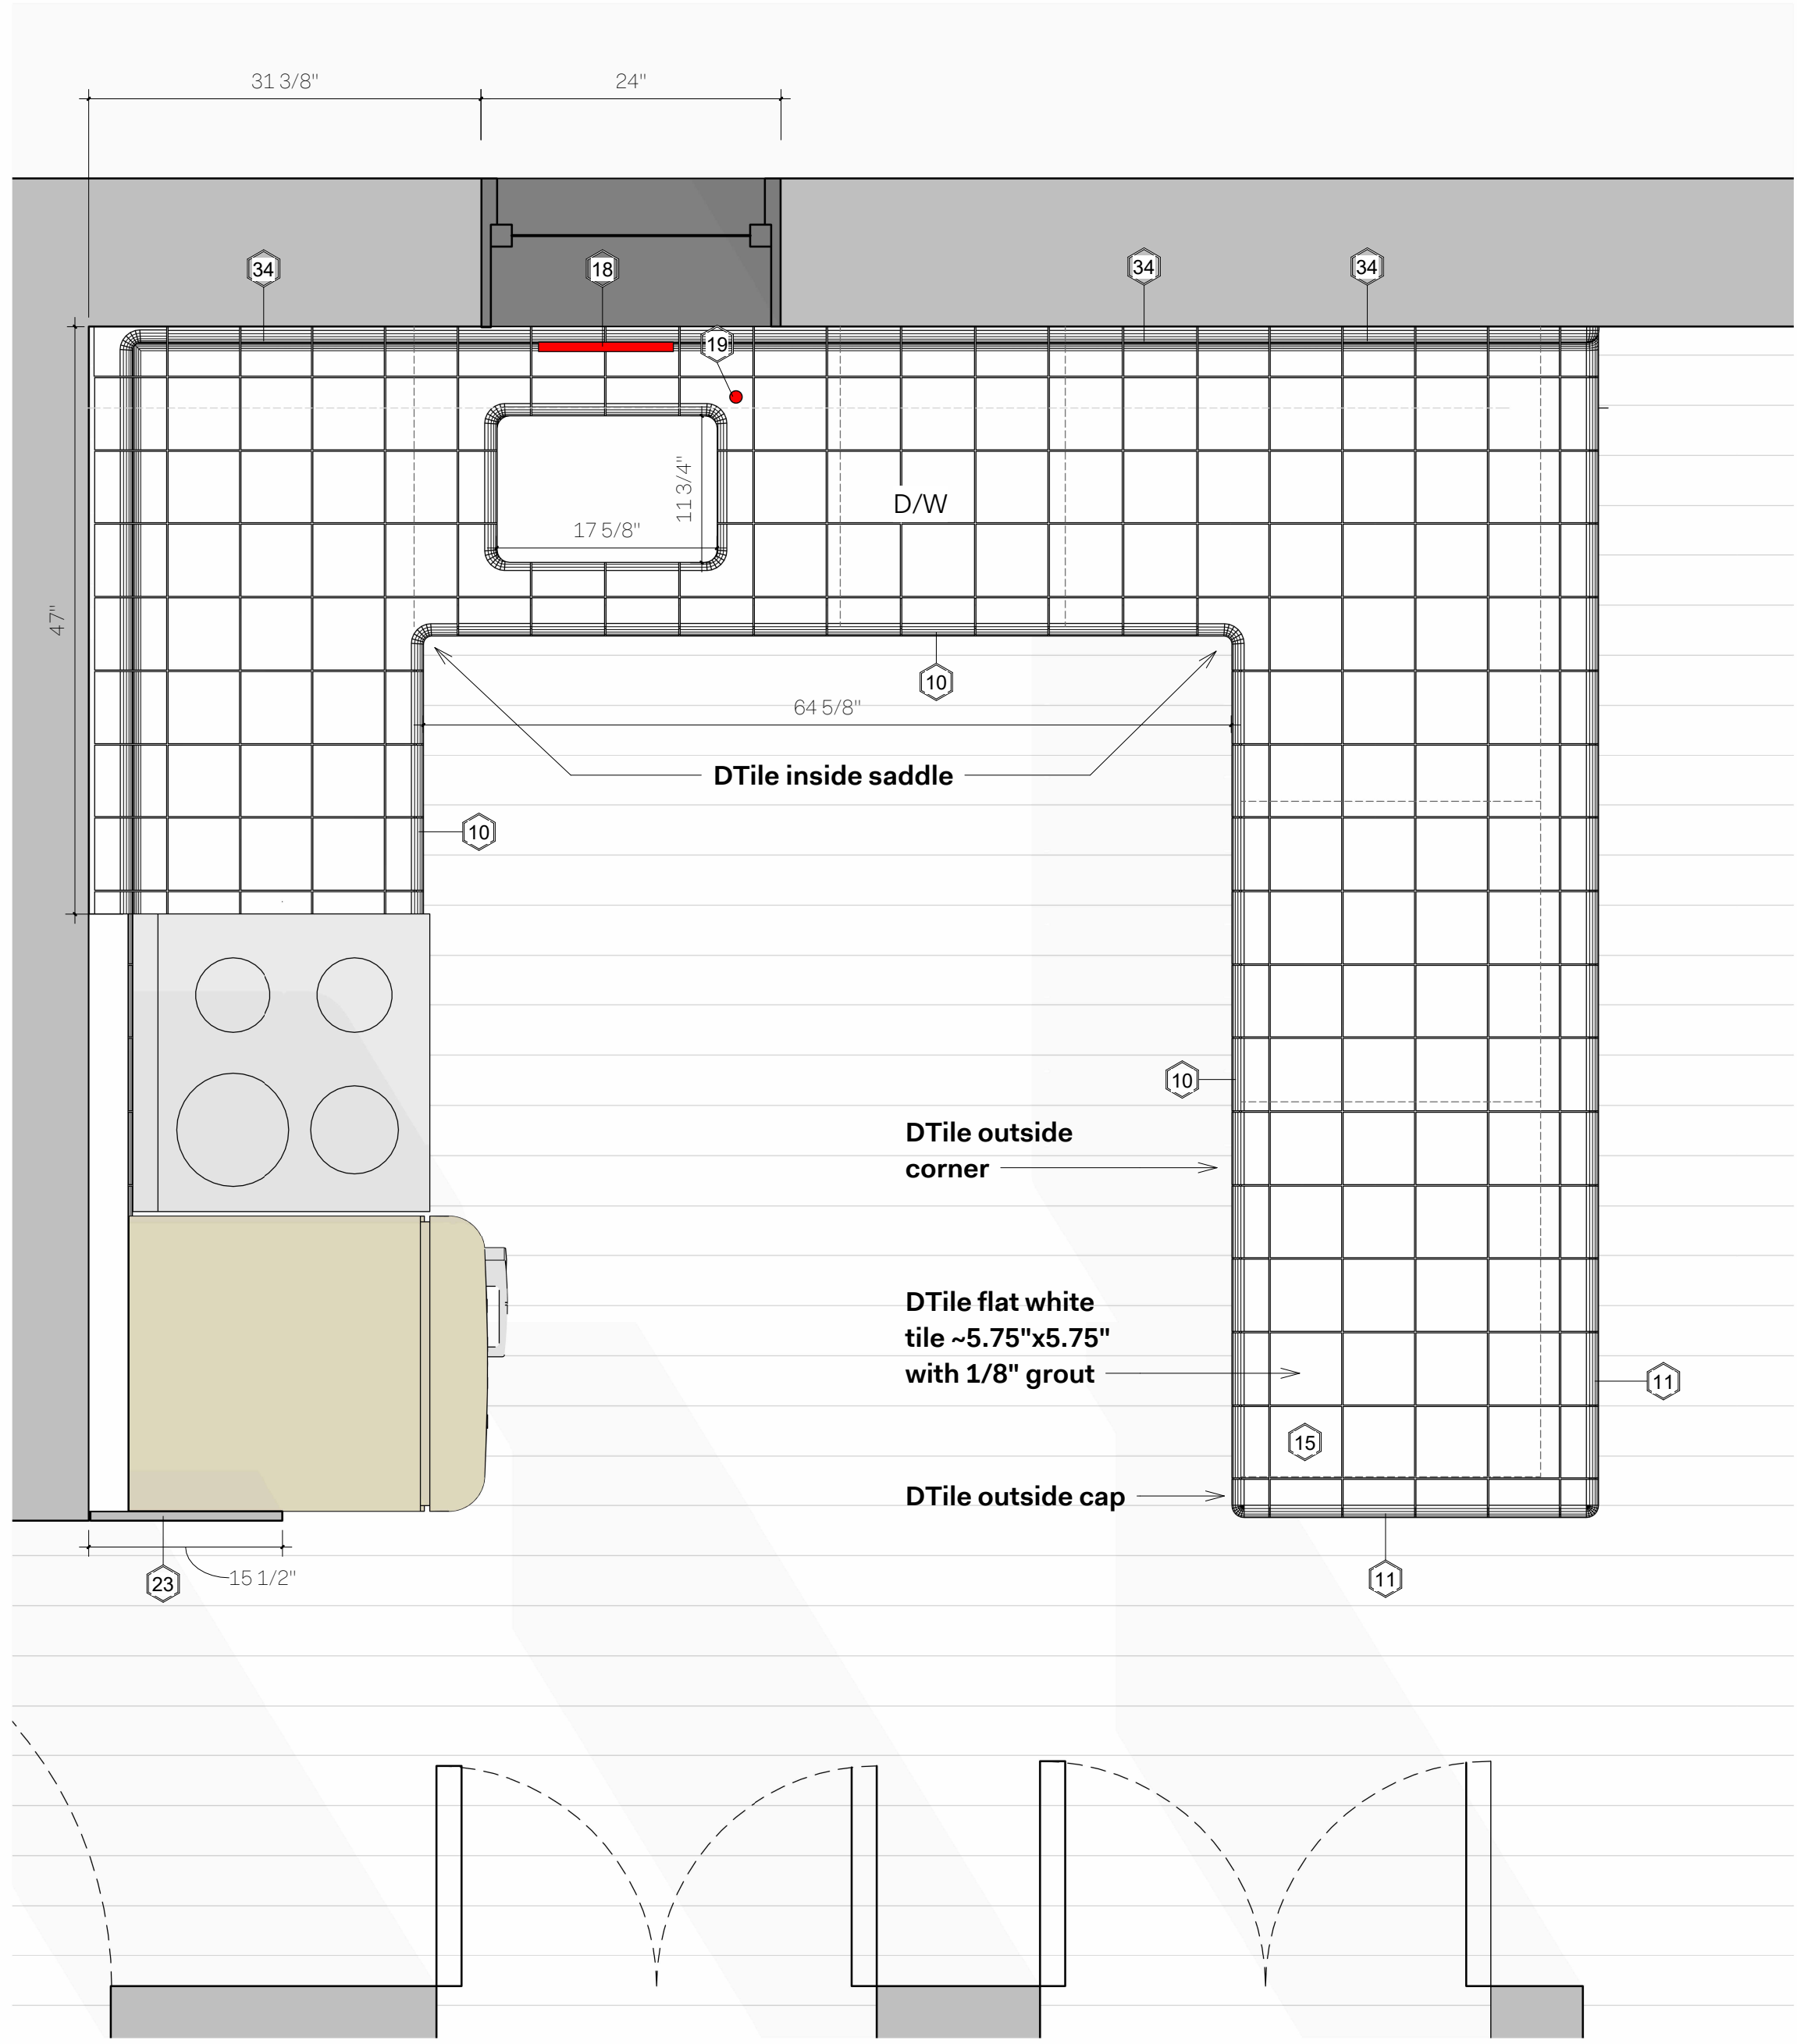

Tile Counter Corner Detail

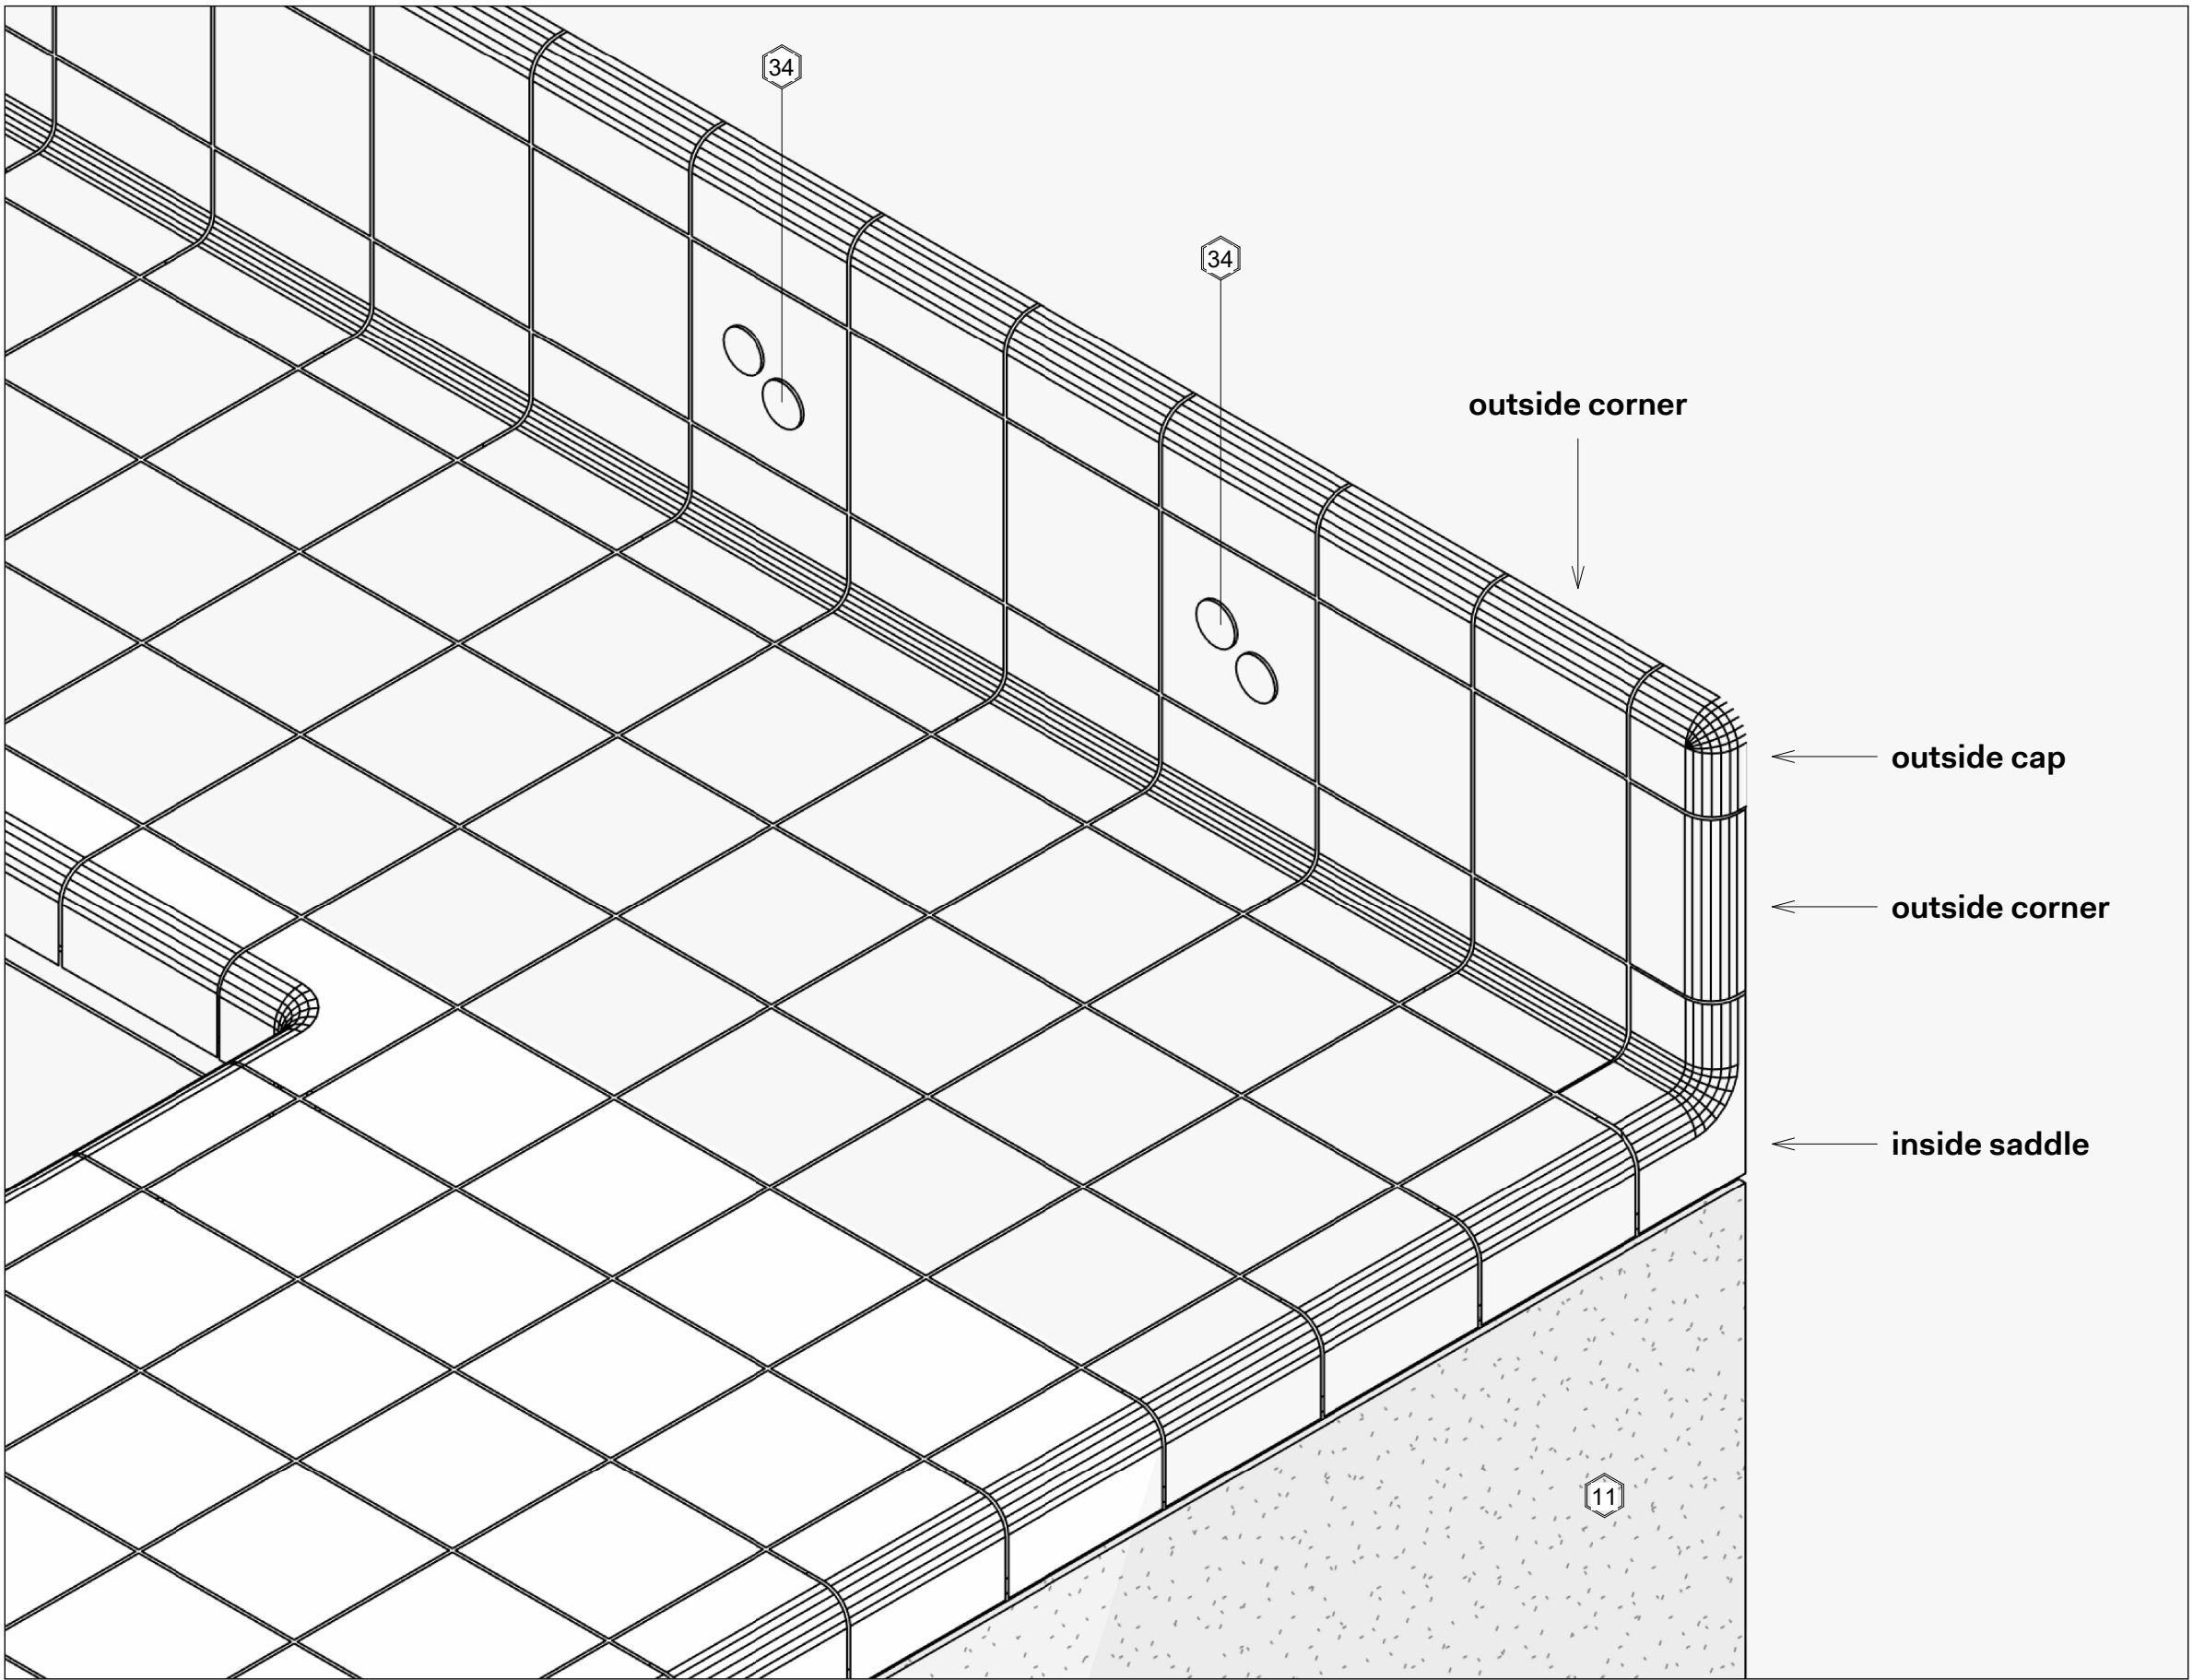

Tile Counter Edge Detail

CO Adaptive

Architect
CO Adaptive Architecture PLLC
Building 303, Suite 603
63 Flushing Avenue
Brooklyn, NY 11205
t. 347.896.0465
hello@coadaptive.co

Contractor
New Level Comfort Group LLC
8250 15th Ave. Unit F1
Brooklyn, NY 11234
t. 347.896.2972

Owner & Project Information

F8

8 FIRST STREET, BROOKLYN, NY 11231

Louise De Nexon

DOB NOW #

Drawing Title

Construction Details

Drawing Scale: 1/4" = 1'-0"
100% @ Arch D (24" x 36")

Project Number

F8

Issue Date

04.28.2023


Sheet Number

5 /


Drawing Number

A-601


Copyright 2022 CO Adaptive Architecture PLLC All rights reserved

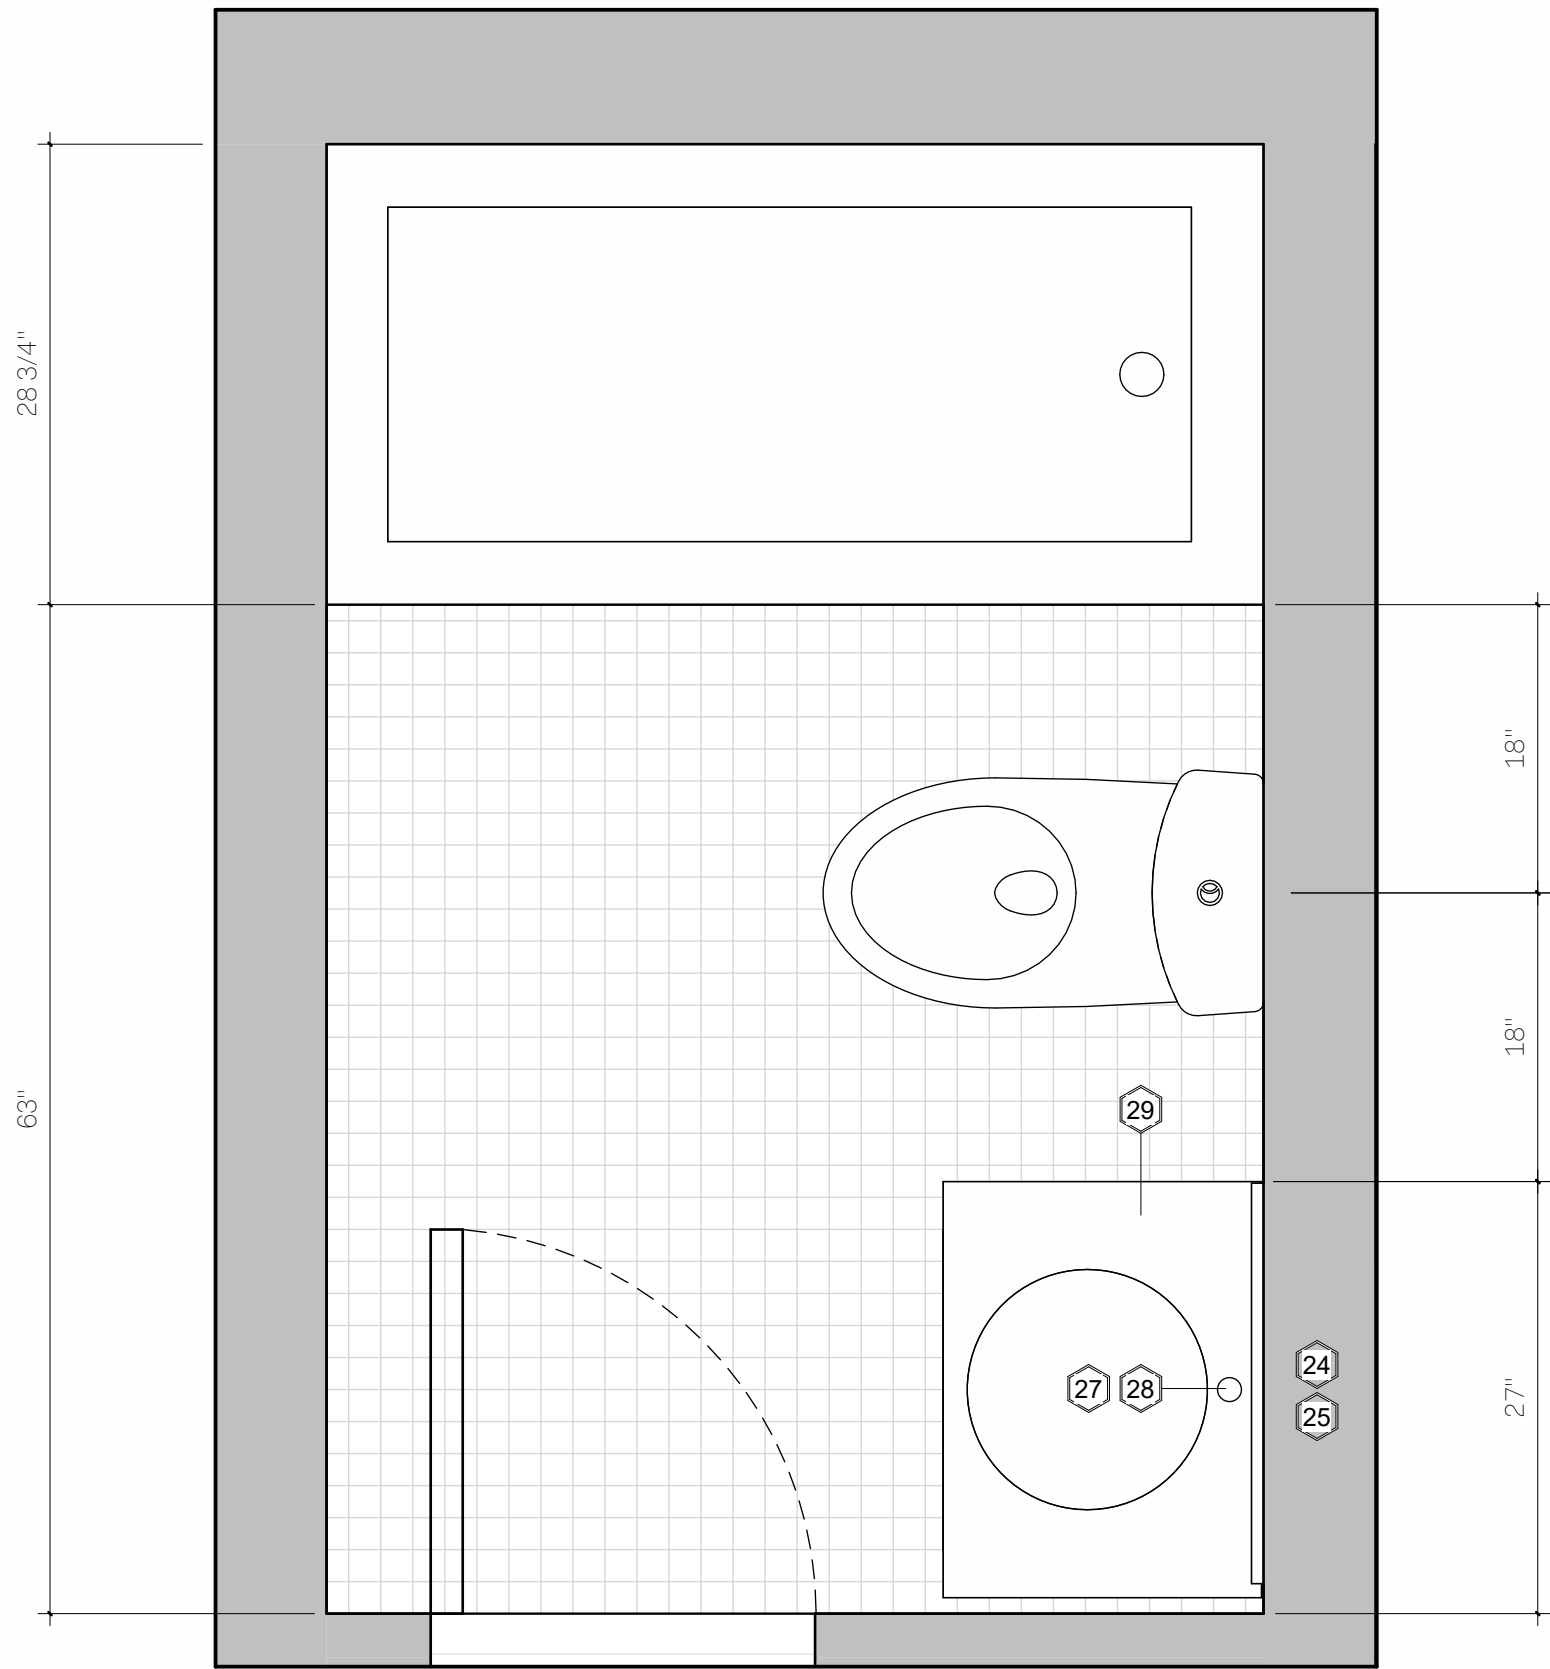


1 BATHROOM PLAN
1" = 1'-0"

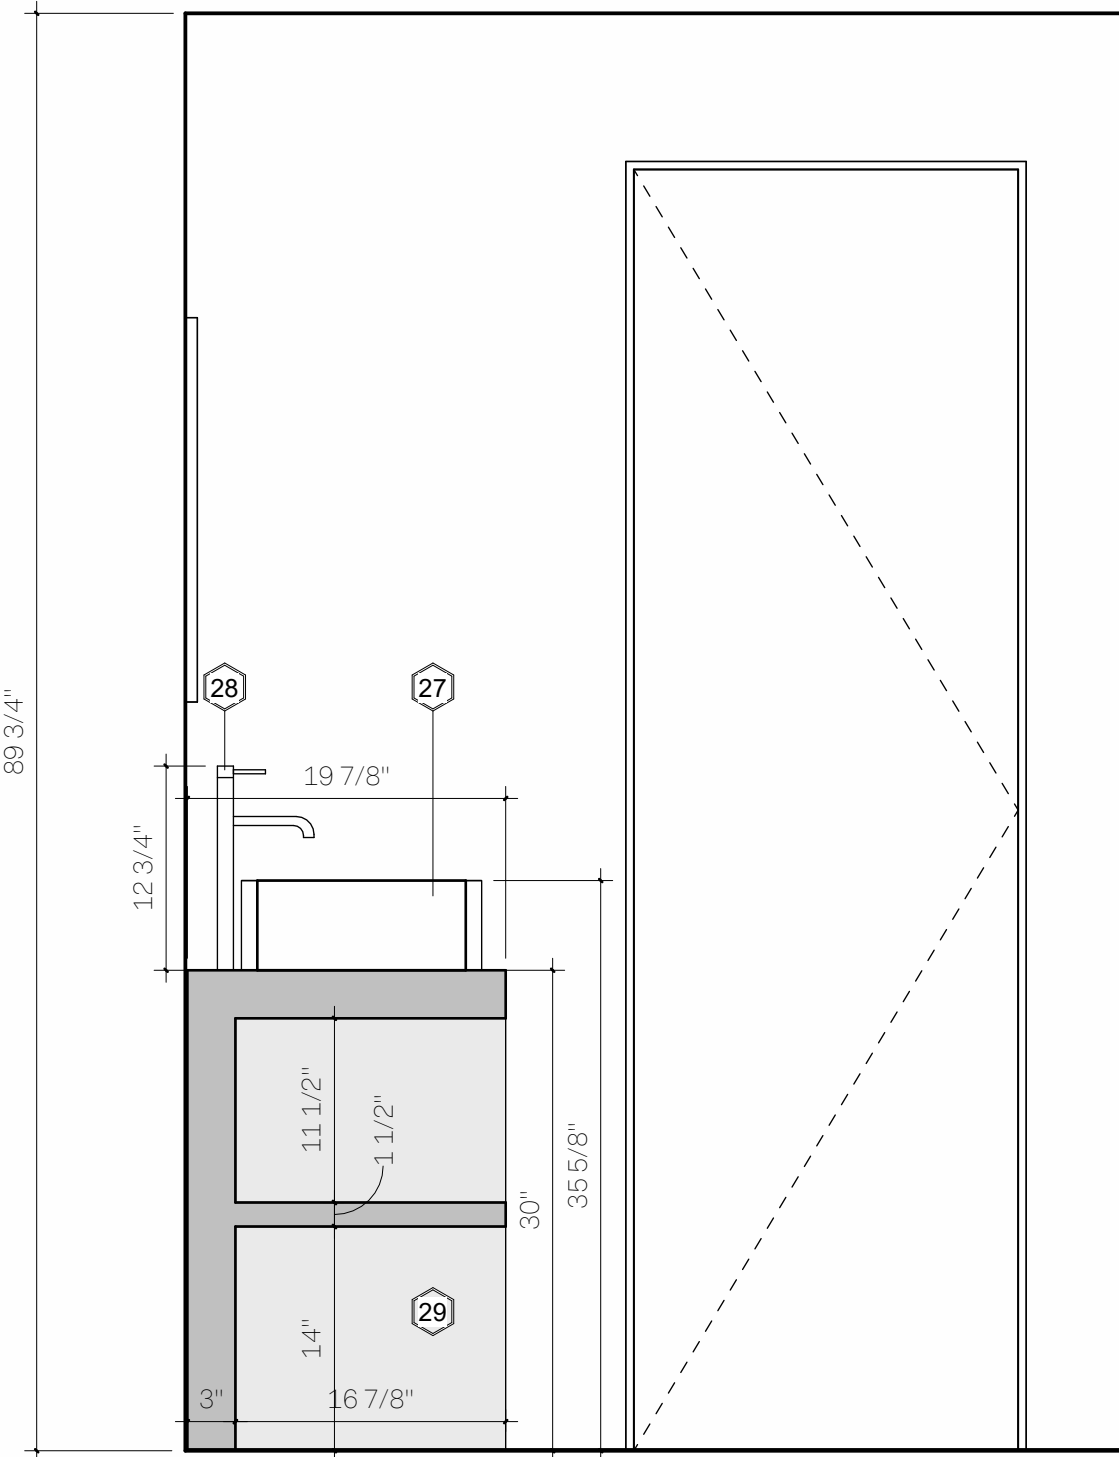

3 BATHROOM D
1" = 1'-0"

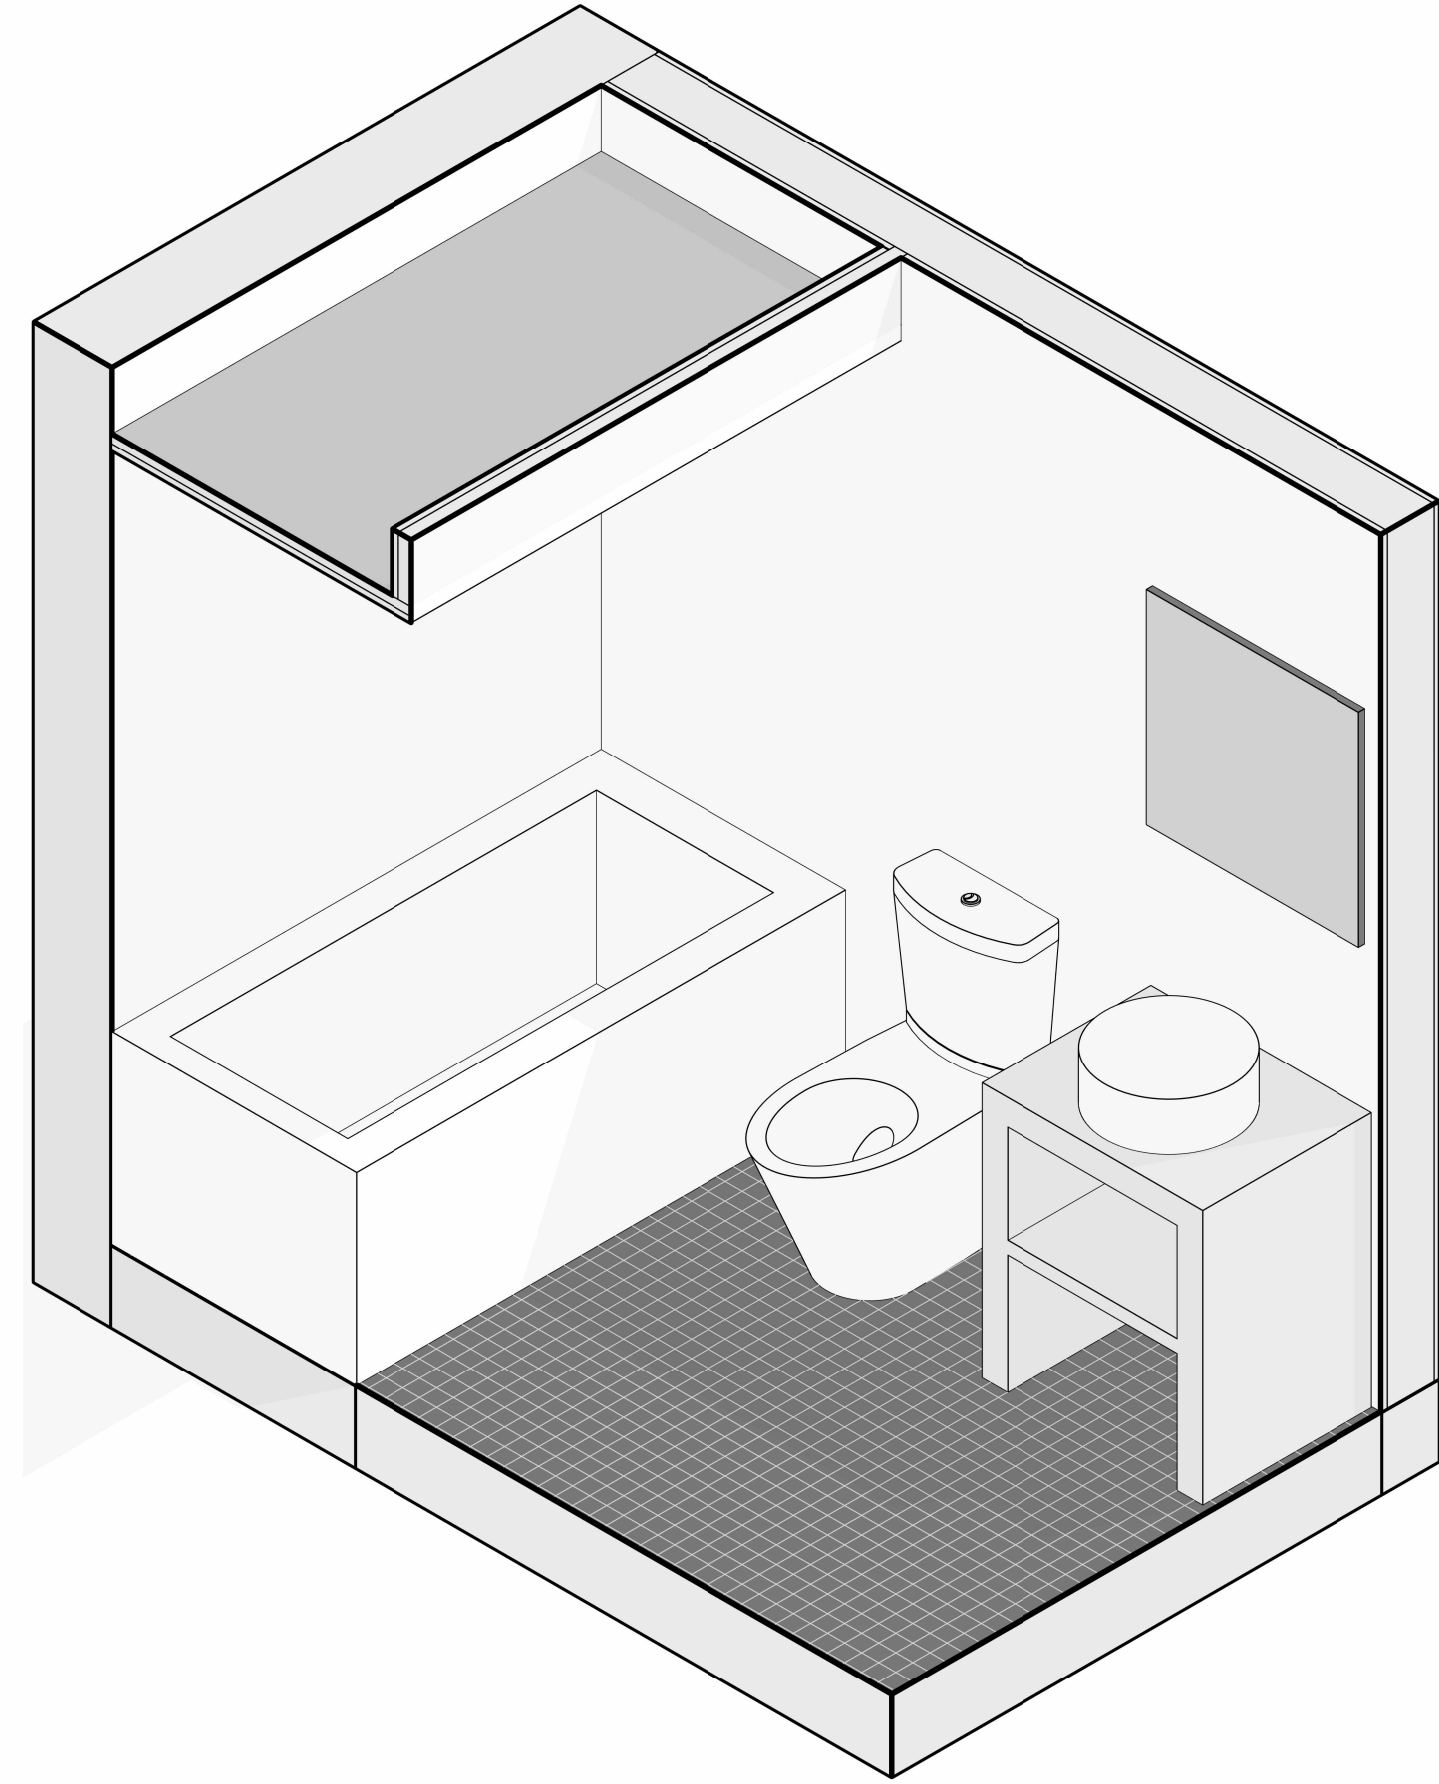

4 Bathroom Axon

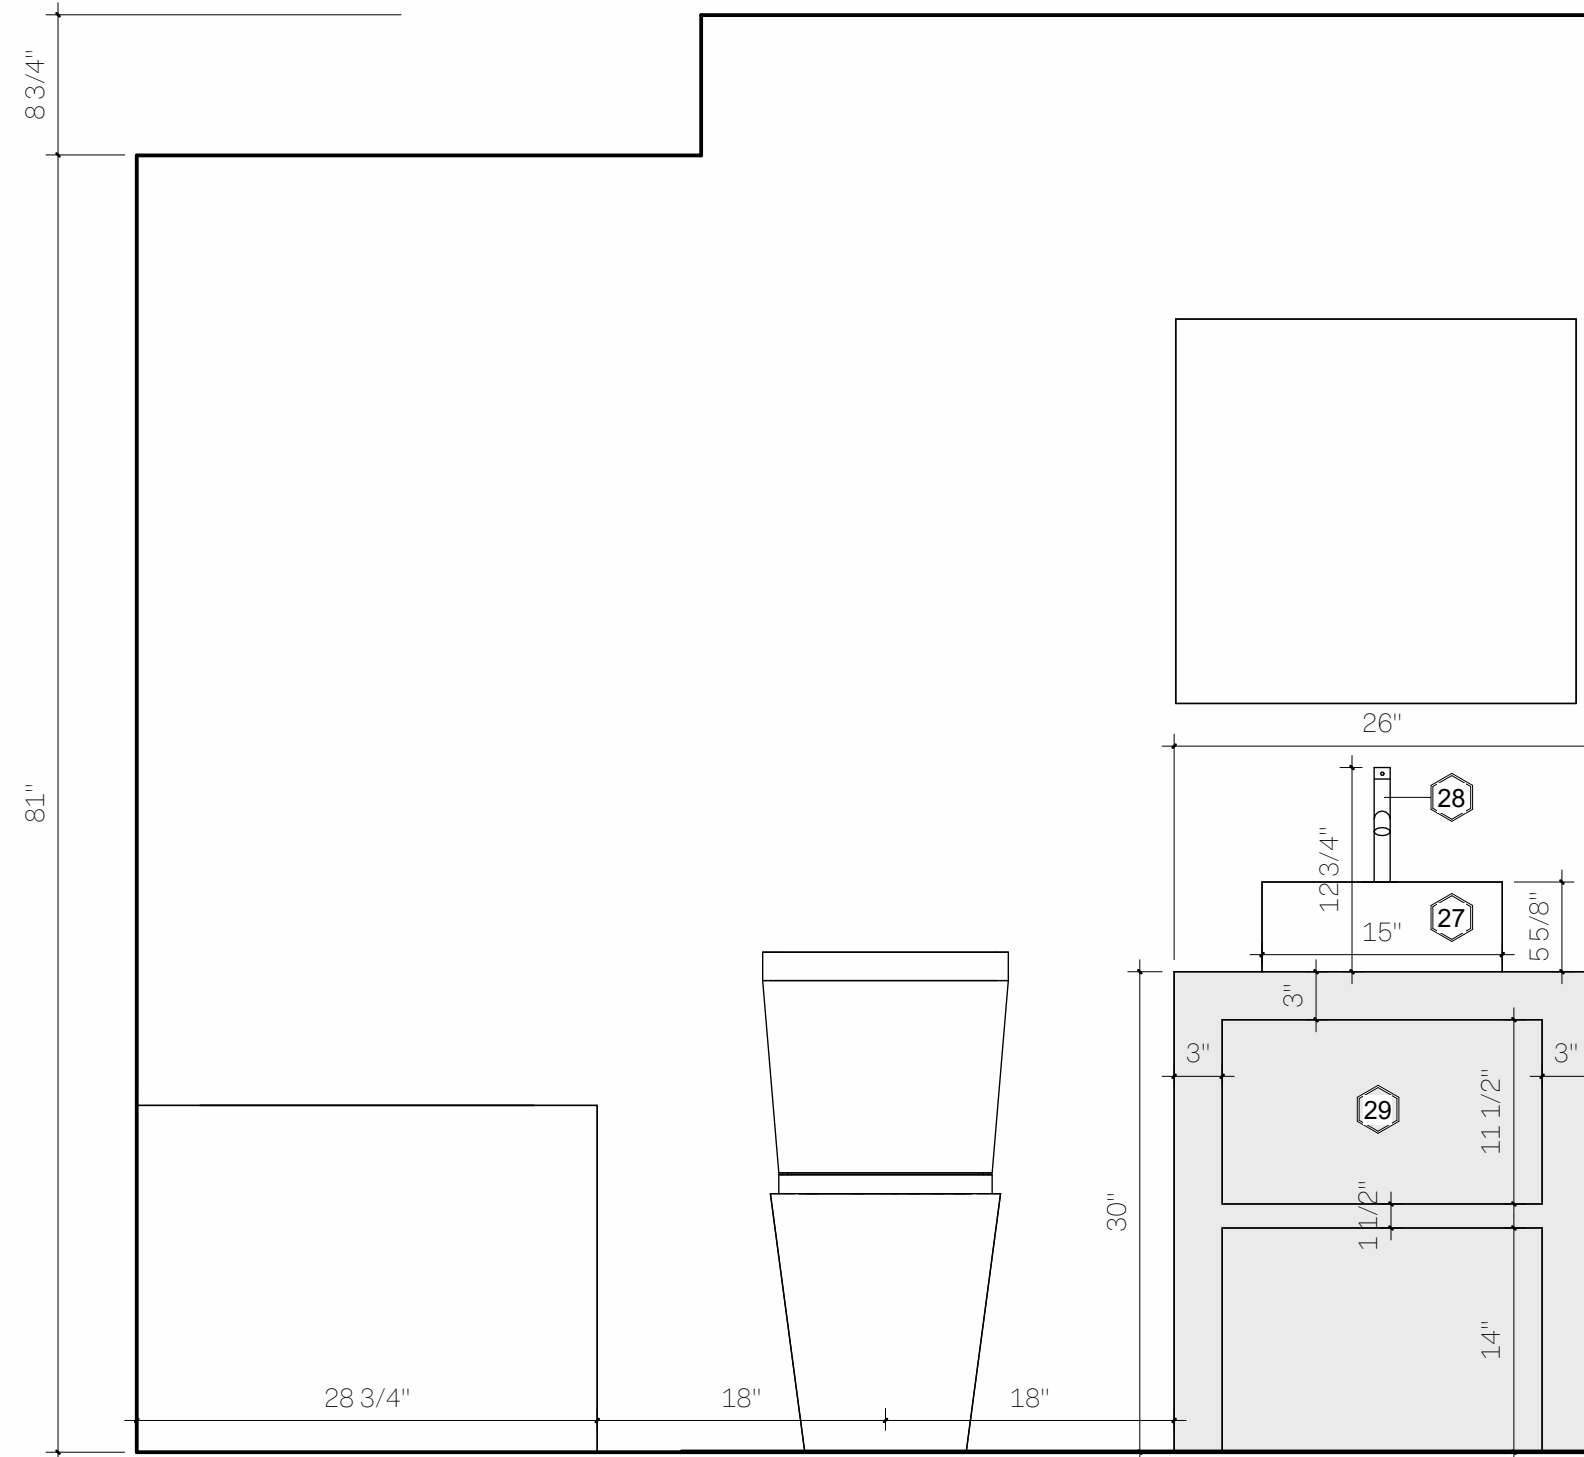

2 BATHROOM C
1" = 1'-0"

CO Adaptive

Architects
CO Adaptive Architecture PLLC
Building 303, Suite 603
63 Flushing Avenue
Brooklyn, NY 11205
t. 347.586.0465
hello@coadaptive.co

Contractor
New Level Comfort Group LLC
8210 15th Ave. Unit F1
Brooklyn, NY 11234
t. 347.896.2972

Owner & Project Information

F8

8 FIRST STREET, BROOKLYN, NY 11231

Louise De Nexon

DOB NOW #

Drawing Title

Bathroom Elevations

Drawing Scale: 1" = 1'-0"
100% @ Arch D (24" x 36")



Project Number

F8

Issue Date

04.28.2023


Sheet Number

4 /

Drawing Number


A-401


LIGHTING FIXTURE SCHEDULE - ABBREVIATED			
TAG	QTY	DESCRIPTION	PRODUCT
P	2	Pendant	Owner Supplied
S	3	Spotlight	Owner Supplied

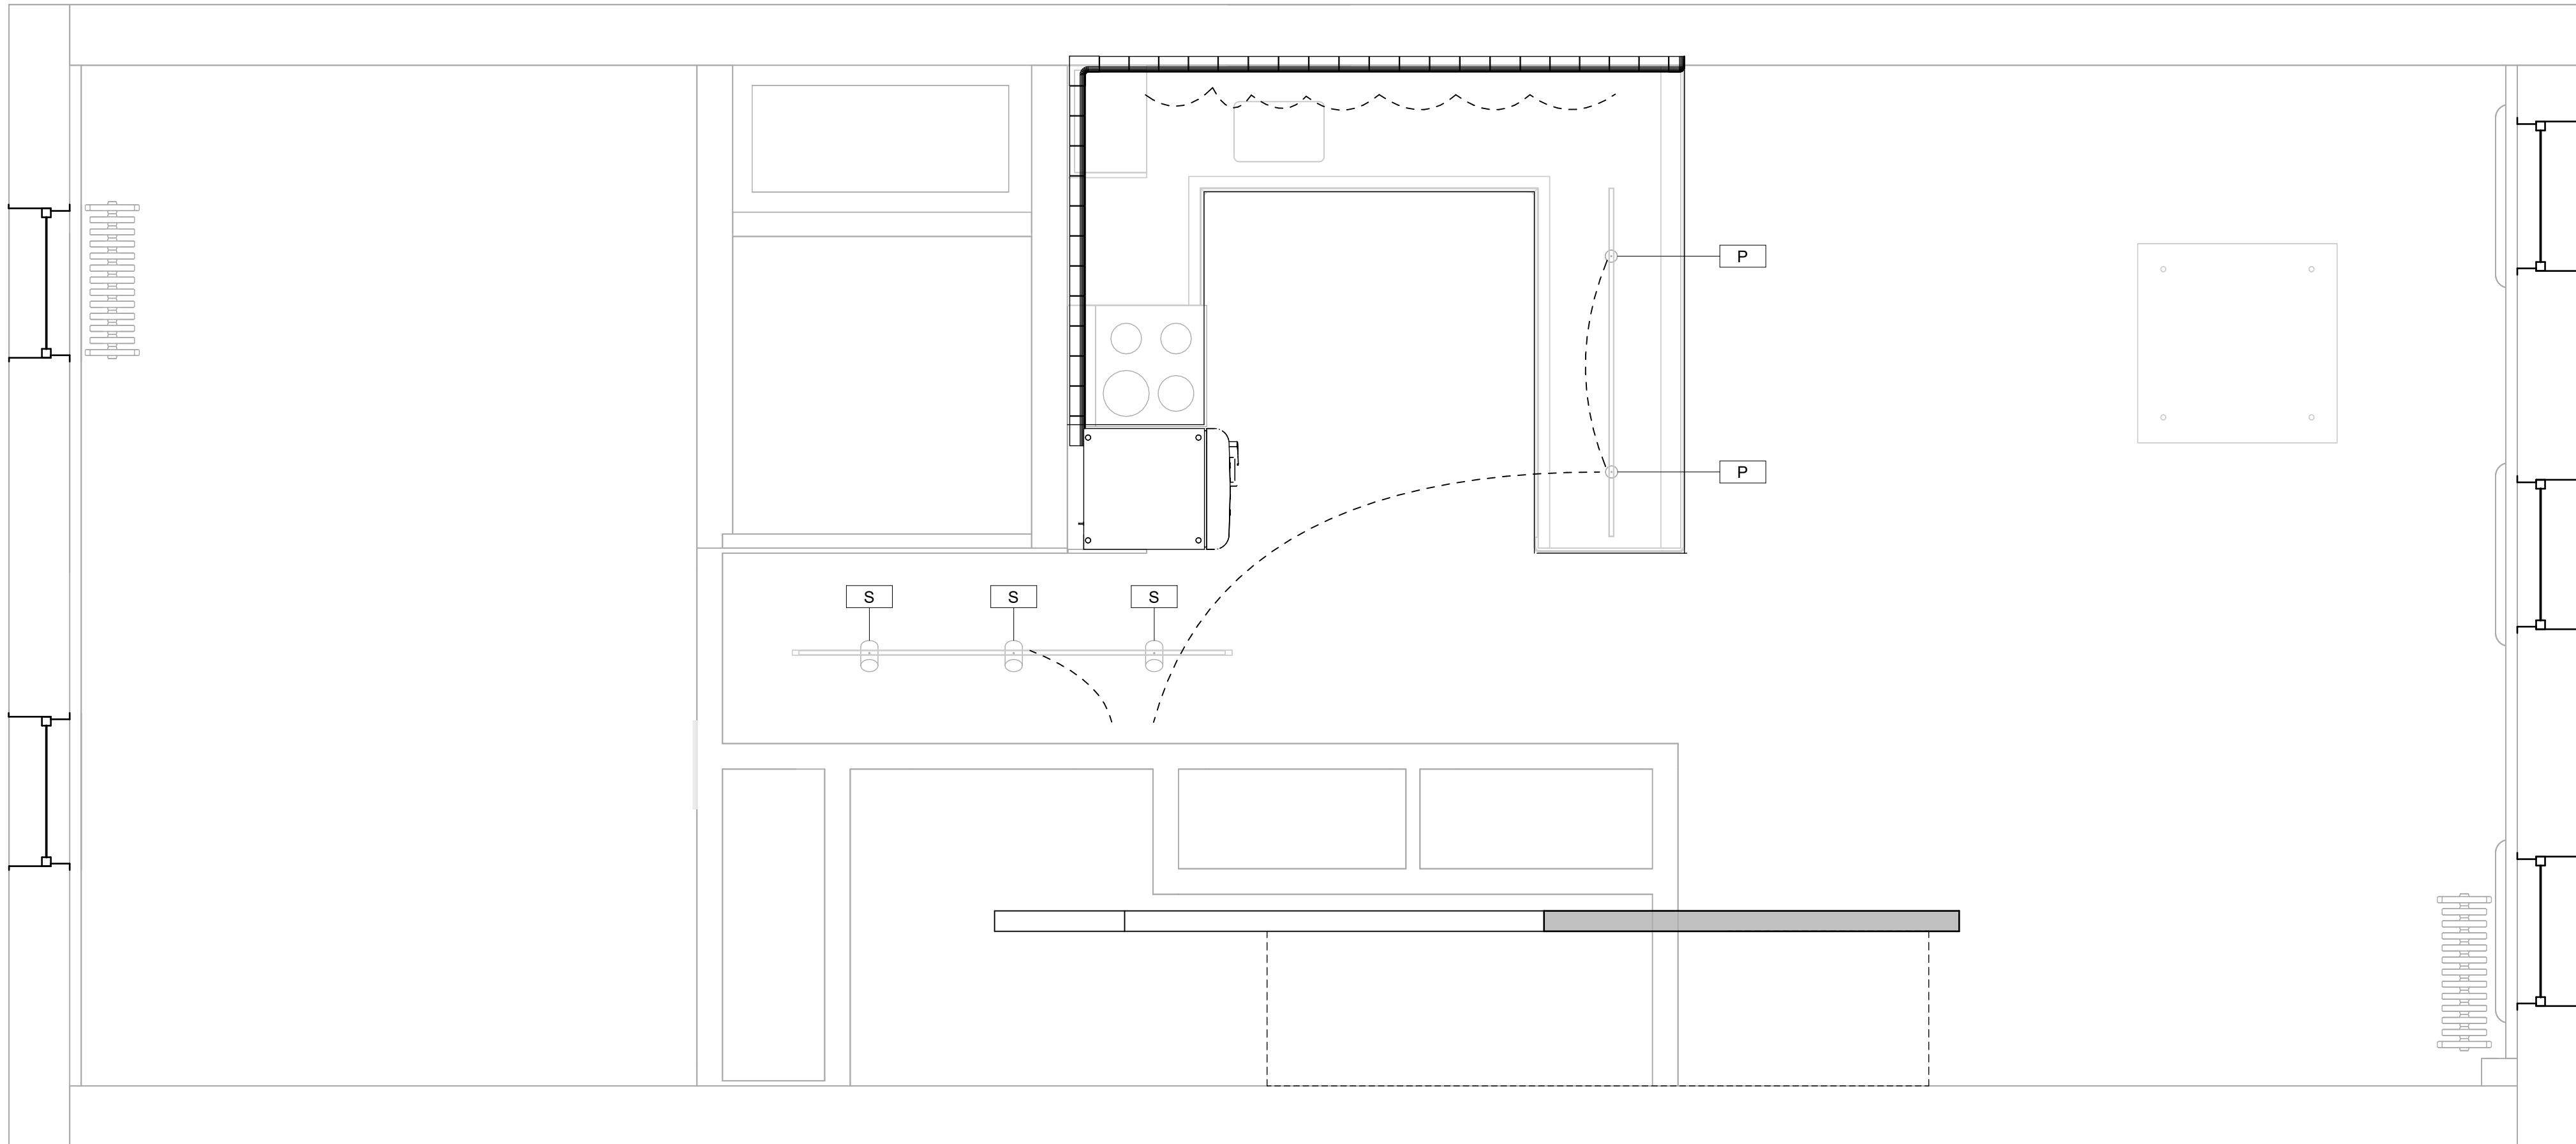


1 Reflected Ceiling Plan & Lighting
1/2" = 1'-0"


ELECTRICAL & SWITCHING LEGEND


- 


DUPLEX ELECTRICAL OUTLET
14" ABOVE FINISHED FLOOR
UNLESS OTHERWISE NOTED
- 


SURFACE MOUNTED
EXTERIOR GRADE,
ELECTRICAL OUTLET
14" ABOVE FINISHED FLOOR
UNLESS OTHERWISE NOTED
- 


GROUND FAULT INTERRUPT
OUTLET +45" ABOVE FINISH
FLOOR UNLESS OTHERWISE
INDICATED
- 


DEDICATED ELECTRIC
RECEPTACLE - FOLLOW
MANUFACTURER'S
REQUIREMENTS FOR DEVICE
TO BE INSTALLED AT EACH
SUCH RECEPTACLE.
- 

CABLE TV / DATA RECEPTACLE
14" ABOVE FINISHED FLOOR
UNLESS OTHERWISE NOTED
- 

TEL/DATA RECEPTACLE
14" ABOVE FINISHED FLOOR
UNLESS OTHERWISE NOTED
- 

2-WAY SWITCH
MOUNTED 48" ABOVE
FINISHED FLOOR U.O.N.
- 

3-WAY SWITCH
MOUNTED 48" ABOVE
FINISHED FLOOR U.O.N.
- 

BUZZER W/ VIDEO
- 

THERMOSTAT
- 

SMOKE DETECTOR

CO
Adaptive

Architects
CO Adaptive Architecture PLLC
Building 303, Suite 603
63 Flushing Avenue
Brooklyn, NY 11205
t. 347.896.0465
hello@coadaptive.co

Contractor
New Level Comfort Group LLC
8250 15th Ave. Unit F1
Brooklyn, NY 11234
t. 347.896.2972

Owner & Project Information

F8

8 FIRST STREET, BROOKLYN, NY 11231

Louise De Nexon

DOB NOW #

Drawing Title

RCP & Lighting Plan

Drawing Scale As indicated
100% @ Arch D (24" x 36")

Project Number

F8

Issue Date

04.28.2023

Sheet Number

6 /

Drawing Number

A-111

